

TECHNICAL SPECIFICATION | MATERIALS | SIZES | BUDGETARY PRICES

Labor Hutments

Comprehensive product specification for procurement, design coordination and quotation review.

REFERENCE CONFIGURATION	10x10 ft
COST ESTIMATION INPUT	INR 765 / sq.ft.
PUBLISHED SIZE OPTIONS	6 workbook-controlled configurations
SPECIFICATION PROFILE	17 product-specific + 13 platform-common lines
TECHNICAL REVIEWER	PENDING - name, designation and date to be entered at technical review
SEO / EDITORIAL REVIEWER	PENDING - name and date to be entered at editorial review
DOCUMENT STATUS	DRAFT - not released until both reviewer fields above are signed

Product overview

Compact worker sleeping units for small crews and phased site mobilization. This page distinguishes simple hutments from open labor sheds and full prefab camps by using smaller footprints, one-room or two-room planning, modest services, direct cross-ventilation and optional relocation-oriented floor systems.

Costing status: Approved - inherited SAMAN controlled planning rate

Important: This PDF is generated from the controlled technical workbook and review corrections. It does not replace the approved project drawing, structural design, bill of materials, performance certificate or final commercial quotation.

Specification Overview

Compact worker sleeping units for small crews and phased site mobilization. This page distinguishes simple hutments from open labor sheds and full prefab camps by using smaller footprints, one-room or two-room planning, modest services, direct cross-ventilation and optional relocation-oriented floor systems.



BOTTOM FRAME	IS 2062 or approved equivalent MS channel/RHS/formed sections; exact member sizes and support reactions from the signed structural drawing.
EXTERIOR WALLS	Budget tier: GI/PPGI sheet with bracing/liner as specified; insulated tier: nominal 30-40 mm PUF panel, with 40-60 mm range only where the signed BOM selects it.
ROOF	Profiled PPGI/GI sheet or insulated roof panel on light framing, with roof fall, side flashing, weatherhood at the door and optional gutter.
FLOOR BASE	18-24 mm board/cement board on verified steel joists for relocatable units, or RCC/plinth for site-built hutments.
WALL INSULATION	None/liner for GI budget option or nominal 30-40 mm PUF for insulated option; higher thickness only by climate/contract.
ROOF INSULATION	30-40 mm insulated roof panel or light roof plus approved radiant/insulation layer where specified.
MAIN DOOR / SERVICE DOOR	Nominal 900 mm class MS/insulated/flush door with weather seal, durable hinges and lockset; exact swing from the room plan.
LAYOUT / CONFIGURATION	Single open room or two simple sleeping rooms with beds/bunks, central aisle, lockers and opposing openings; typical small modules serve roughly 4-16 workers depending on approved bed plan.

Selection and scope control

- Use the reference specification to compare quotations line by line, not only by total price.
- Freeze product-specific options in the approved drawing, bill of materials and quotation before manufacture.
- Verify project-controlled performance claims against the exact selected assembly, certificates and test evidence.
- Treat published prices as workbook-controlled budget estimates; final scope, taxes, transport and site conditions govern the order value.

Technical Diagrams

The following 16:9 diagrams are supplied as separate PNG files and embedded here for buyer explanation.

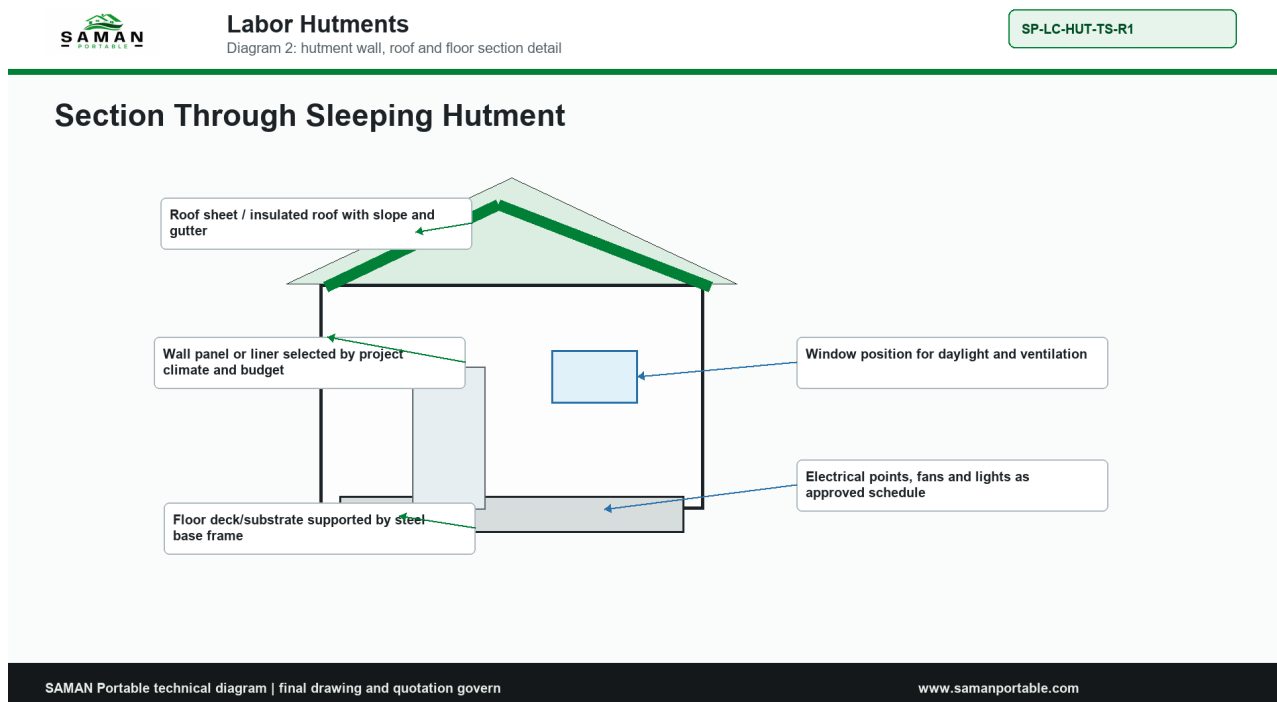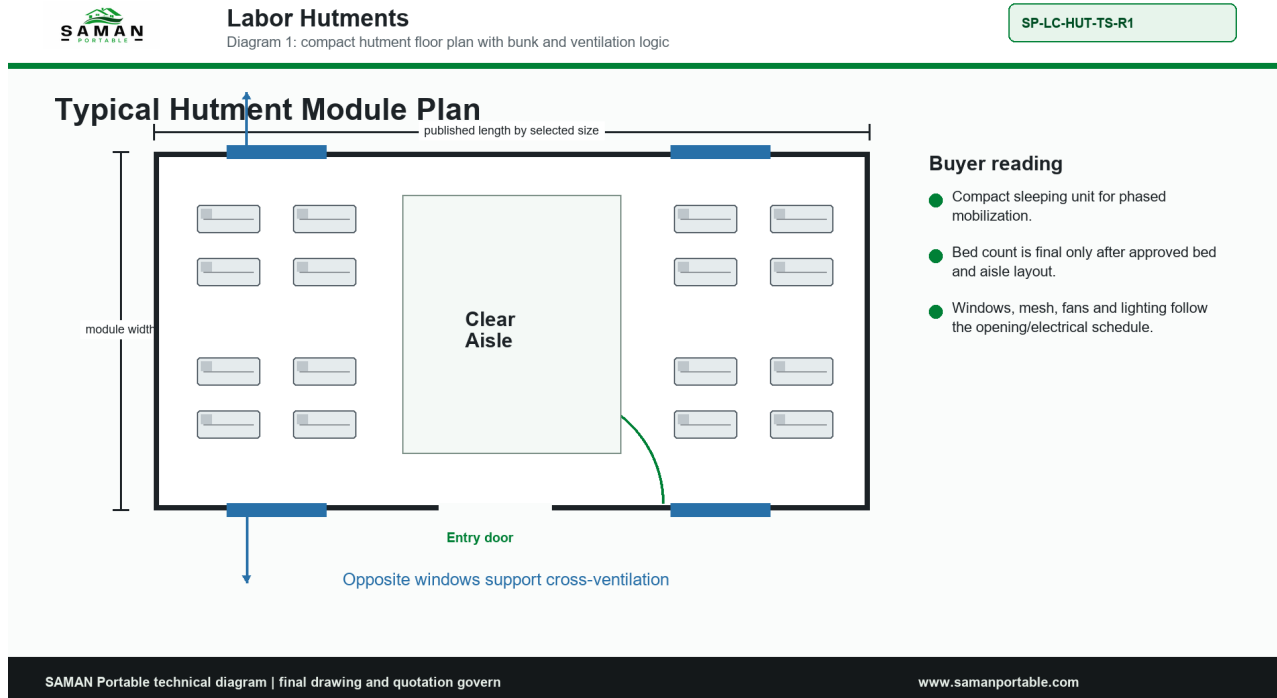

Technical Specification: Steel Structure

Component / scope	Baseline specification	Detailed design and coordination notes
Bottom frame Platform Common	IS 2062 or approved equivalent MS channel/RHS/formed sections; exact member sizes and support reactions from the signed structural drawing.	The base system transfers occupied, service, transport and local equipment loads to defined pads, plinths, slab or skid contact points. Anchor position, corrosion access and allowable bearing are frozen before fabrication; no nominal member is treated as universal across hutments, sheds, wet blocks and camp modules.
Bottom stiffeners Platform Common	RHS/channel/angle stiffeners selected to the approved floor grid, partitions, bunks, wet services and lifting/relocation duty.	Stiffener spacing is coordinated with board edges, bunk posts, cubicle partitions, concentrated equipment and openings. Site cutting, member substitution and service penetrations require approval so the intended load path and corrosion protection are not lost.
Floor frame Product-Specific	Prefab option: steel joists with 18-24 mm cement/cement-fibre or plywood class board and vinyl; fixed option: level RCC/plinth with screed.	The simple floor assembly targets rapid cleaning and basic sleeping loads. Wet rooms are not part of the baseline hutment; if one is added, the floor changes to a waterproof, sloped wet-area system.
Top frame Platform Common	MS RHS/channel or the documented proprietary upper rail sized for roof reactions, wall restraint and opening headers.	The upper frame closes the structural box, supports roof members and distributes wind and handling loads. Stair, canopy, stacked floor, tank, solar, exhaust or service-platform reactions are added only after project engineering.
Roof stiffeners Product-Specific	Light RHS/angle rafters and purlins for a single-slope or simple gable PPGI roof; insulated-panel roof used only on the selected prefab tier.	Short spans keep the roof simple and repairable. Eaves, overhang, flashing and gutter are sized for the module; no roof-deck, tank or heavy equipment load is assumed.
Corner posts / walls Product-Specific	Light welded/bolted MS angle or RHS corner posts with intermediate rails sized for the selected GI or PUF wall system.	The hutment frame prioritizes repeat fabrication and easy panel replacement. A single-piece-lift model and a dismantlable panel model use different connections and lifting details and are identified separately.
Lifting / handling Platform Common	Marked lifting lugs, corner fittings, skid points or temporary transport brackets only where shown on the signed GA and lifting drawing.	The lift plan identifies finished weight, centre of gravity, sling geometry, spreader need and support points. One-piece lifting is not assumed for site-assembled sheds or panel camps, and forklift handling is allowed only when pockets and capacity are documented.
Welding & fabrication Platform Common	IS 2062 / IS 1161 class structural steel or approved equivalent; weld sizes, bolt grades, hole tolerances and joint details as the fabrication drawings.	Fabrication checks cover fit-up, weld continuity, distortion, dimensions, bolt tightening, sharp edges and coating repair. IS 800 / project welding requirements are design references; certified WPS/PQR/NDT is supplied only when specified in the contract or QA plan.

Technical Specification: Walls, Roof, Floor & Insulation

Component / scope	Baseline specification	Detailed design and coordination notes
Exterior walls Product-Specific	Budget tier: GI/PPGI sheet with bracing/liner as specified; insulated tier: nominal 30-40 mm PUF panel, with 40-60 mm range only where the signed BOM selects it.	The page presents a clear budget-versus-insulated choice rather than claiming both. Edge closure, base flashing, impact protection near beds and cleanable internal surfaces are specified with the chosen tier.
Roof Product-Specific	Profiled PPGI/GI sheet or insulated roof panel on light framing, with roof fall, side flashing, weatherhood at the door and optional gutter.	Roof drainage is kept external and visible for field maintenance. An uninsulated roof may require a radiant/ceiling treatment in hot sites; this is separately priced.
Interior walls Product-Specific	Painted sheet, prelaminated board or simple cement-board liner according to the wall tier; no premium decorative package in the baseline.	The lining is selected for low maintenance and repair around bunks/lockers. Concealed cavities remain accessible at electrical junctions and are protected from insect entry.
Ceiling Product-Specific	Prelaminated board/cement board or underside of insulated roof panel; service battens only where needed for lights/fans.	A false ceiling is optional, not a default feature. Clear headroom and cross-ventilation are preserved, and fan support is fixed to structure rather than thin lining.
Floor base Product-Specific	18-24 mm board/cement board on verified steel joists for relocatable units, or RCC/plinth for site-built hutments.	Board edges are supported and sealed. The substrate is not used as a wet-room floor without waterproofing, falls and drain detailing.
Floor finish Product-Specific	Commercial vinyl/PVC or sealed cement screed as selected; slip-resistant upgrade only where site conditions justify it.	The finish allows sweeping/mopping around beds and lockers. Thresholds and skirting are simple and replaceable; decorative residential finishes are outside the baseline.
Wall insulation Product-Specific	None/liner for GI budget option or nominal 30-40 mm PUF for insulated option; higher thickness only by climate/contract.	The page avoids claiming a thermal value from panel thickness alone. Joints, roof, floor and openings are considered with the selected comfort tier.
Roof insulation Product-Specific	30-40 mm insulated roof panel or light roof plus approved radiant/insulation layer where specified.	Ceiling air gap, ridge/eave ventilation and fan layout are coordinated so added insulation does not trap moisture or block airflow.
Decorative / external finish Product-Specific	Plinth/pedestals, drainage apron, short walkway and external light point as separately scoped site works.	Hutments are deliberately kept simple. Central roads, STP, dining and major utilities belong to the labour-colony project scope, not the individual unit base price.
Fasteners & sealing Platform Common	Corrosion-compatible fasteners, EPDM washers, butyl/PU sealants, closures, flashing, sleeves and isolation tapes matched to the selected wall/roof/floor build-up.	Joints and penetrations are detailed to drain outward, remain cleanable and allow maintenance. Sealant is not used to hide poor laps, unsupported joints or wet-area movement; field drilling is deburred, protected and resealed.

Technical Specification: Doors, Windows, Electrical & Services

Component / scope	Baseline specification	Detailed design and coordination notes
Main door / service door Product-Specific	Nominal 900 mm class MS/insulated/flush door with weather seal, durable hinges and lockset; exact swing from the room plan.	The door is placed to preserve the central aisle and bed clearance. A second exit is added only if required by occupancy/layout; no universal egress count is asserted.
Windows / service opening Product-Specific	Typically two aluminium sliding/openable windows on opposing walls with louvre/mesh options for cross-ventilation and basic daylight.	Window sill height and bed positions are coordinated to avoid blocked airflow. Grilles are site-security options and must not compromise escape where an opening is part of the egress strategy.
Grills / mosquito mesh Platform Common	Removable mosquito mesh, louvres, restrictors, privacy screens or protected MS grilles only where required by room use and the approved opening schedule.	Accessories maintain ventilation, cleaning access and emergency escape. Sleeping areas, canteens and sanitation blocks use different privacy/security treatments; grille and mesh are not assumed on every opening.
Electrical wiring Platform Common	Typical references: 1.5 sq.mm lighting, 2.5 sq.mm socket circuits and 4 sq.mm AC/high-load circuits; final cable sizing follows connected load, voltage drop and protection coordination.	FR/FRLS copper wiring is routed in approved conduit/trunking with protected metal penetrations and separation from water, waste, LPG/data and flexible module joints. Final cable size and derating are confirmed by the project electrical schedule.
Electrical protection Platform Common	Main isolator, MCB/RCBO or RCCB protection, labelled neutral/earth bars, bonding and surge protection where required by the supply/risk assessment.	Steel frame and exposed conductive parts are bonded to the tested site earth. Wet-area circuits, generator/DG/UPS changeover, fault level and external supply interface follow the approved single-line diagram; this workbook does not certify the installation.
Electrical fittings Platform Common	LED luminaires, fan points, 6A/16A sockets, exhaust points, emergency lighting and dedicated equipment outlets only in quantities shown on the approved room/electrical schedule.	Fixture density follows occupancy and function: sleeper, canteen, wet block, supervisor room and remote camp have different loads. Loose appliances, AC units, kitchen equipment, UPS/DG and data devices are excluded unless itemized.
Ventilation / AC Product-Specific	Opposed windows/louvres plus ceiling or wall fans; split-AC point only when specifically ordered.	The baseline relies on cross-ventilation rather than sealed mechanical cooling. Hot/humid sites may require an upgraded insulated tier or cooling after load review.
Plumbing / sanitary Product-Specific	No internal plumbing in the baseline sleeping hutment; optional basin/pantry point only with dedicated supply/waste connection.	Workers use a separate sanitation/ablution block unless the order explicitly includes an attached wet module. This keeps sleeping-unit scope distinct and avoids hidden plumbing cost.
Layout / configuration Product-Specific	Single open room or two simple sleeping rooms with beds/bunks, central aisle, lockers and opposing openings; typical small modules serve roughly 4-16 workers depending on approved bed plan.	Final occupant count follows bed dimensions, aisle/egress, privacy and site rules. A separate bed per worker and adequate ventilation/sanitation are planning principles; loose beds and lockers are itemized separately unless included.
Painting / coating Platform Common	Prepared carbon steel with compatible primer/top coats, or galvanized/pre-painted sheet with repaired cut edges; system upgraded for coastal, industrial or wet-service exposure.	The coating schedule records preparation, product, coat sequence, colour and repair method. Skid undersides, roof drains, cut edges, wet-area thresholds and inaccessible crevices receive inspection attention because these locations govern field durability.
Quality checks Platform Common	Dimensional, member, weld/bolt, coating, panel, roof-drainage, opening, electrical and plumbing checks plus product-specific deployment or wet-test checks.	Handover evidence identifies the approved GA/BOM, material schedule, test records, photographs, punch items, lifting/service connection data and maintenance points. Fire, thermal, acoustic, structural or hygiene performance is stated only where supported by the contracted evidence.

Warranty and Contract Controls

Component / scope	Baseline specification	Detailed design and coordination notes
Warranty Platform Common	Warranty period, start date, remedy, relocation conditions, consumables and exclusions exactly as stated in the signed quotation and handover documents.	No universal warranty period is imposed by this workbook because attached and public product sources use different commercial packages. Site foundations, utilities, misuse, unauthorized alteration, poor cleaning, blocked drains, missed seal/coating maintenance and relocation damage remain excluded unless expressly covered.

Warranty period, remedy, exclusions and relocation conditions must follow the signed quotation and handover documents. No universal warranty period is imposed by this PDF.

Published Sizes and Budgetary Pricing

The visible Cost Estimation Input control rate is INR 765 per sq.ft. Block price excludes GST. Final estimated price includes GST at 18 per cent.

Code	Published size	Area	Adjusted rate / sq.ft.	Block price excl. GST	Final price incl. GST
SZ-01	10x10 ft	100 sq ft	INR 879.75	INR 87,975	INR 1,03,810
SZ-02	12x10 ft	120 sq ft	INR 879.75	INR 1,05,570	INR 1,24,573
SZ-03	12x15 ft	180 sq ft	INR 841.5	INR 1,51,470	INR 1,78,735
SZ-04	12x20 ft	240 sq ft	INR 734.4	INR 1,76,256	INR 2,07,982
SZ-05	15x20 ft	300 sq ft	INR 734.4	INR 2,20,320	INR 2,59,978
SZ-06	20x20 ft	400 sq ft	INR 726.75	INR 2,90,700	INR 3,43,026

Pricing notes

- Transport and installation: quoted separately for every published size.
- Quantities, openings and services scale with the approved drawing while the product technical framework remains applicable.
- The final written quotation, approved drawing and bill of materials govern the order.

Area-band adjustment rules

100-149 sq ft	15% above
150-199 sq ft	10% above
Exactly 200 sq ft	No adjustment
201-300 sq ft	4% below
301-400 sq ft	5% below
401-500 sq ft	6% below
501-600 sq ft	7% below
601-700 sq ft	8% below
701-800 sq ft	9% below
801-900 sq ft	10% below
Above 900 sq ft	Manual project quotation

Quotation Scope and Price Controls

1. Cost Estimation Input	INR 765	Controlled 200 sq.ft. reference rate for this product.
2. Published size and area	10x10 ft 100 sq ft	Area shown in the workbook size schedule.
3. Adjusted rate	INR 879.75	Control rate multiplied by the applicable area-band factor.
4. Block price excl. GST	INR 87,975	Published area multiplied by the adjusted rate.
5. GST at 18%	INR 15,836	Added to the block price.
6. Final estimated price	INR 1,03,810	Workbook-published total including 18% GST.

Budget exclusions

- Interior fit-out and loose furniture unless explicitly included.
- Optional add-ons and equipment not shown in the approved scope.
- Transport, offloading, positioning and installation unless quoted.
- Foundations, plinths, supports, anchors and external site utilities.
- Project-specific structural engineering, fire or acoustic tests, specialist certificates and third-party approvals unless quoted.

Price disclaimer

These figures are workbook-controlled budget estimates for the published technical framework. Material selection, custom dimensions, quantity, project location, access, performance requirements, taxes and market conditions can change the final quotation.

Project Coordination and Pre-dispatch Quality

A technically complete quotation depends on the project information below. Freeze these inputs before final drawings and manufacture to reduce variations, field cutting and interface disputes.

Information required for a firm quotation

- Project location, climate or exposure condition and intended service life.
- Selected published size or custom dimensions, quantity and required delivery sequence.
- Intended use, occupancy, room layout, partitions and equipment or storage loads.
- Door, window, service opening, grill, louver and security schedule.
- Electrical supply, connected load, AC or ventilation equipment, socket and lighting schedule.
- Water, waste, sanitary, fire, acoustic or other specialist performance requirements where applicable.
- Transport route, site access, crane or unloading plan, lifting restrictions and final support locations.

Pre-dispatch quality checks

Pre-dispatch QA covers dimensions, member/panel identification, connections, coating, roof drainage, weather sealing, doors, windows, electrical continuity and functional checks; specialist performance certificates are verified where the product requires them.

Handover, Maintenance and Warranty Controls

The following controls support acceptance and continued service. Align them with the final quotation, approved drawings, site risk assessment and any specialist manufacturer instructions.

Recommended owner inspection points

- Keep roof drainage paths, gutters and outlets clear; investigate standing water or leakage promptly.
- Inspect flashings, panel joints, sealants, fasteners, door and window perimeters and service penetrations.
- Repair coating, cut-edge or galvanized-surface damage with the compatible approved system.
- Do not add large openings, equipment supports or unapproved penetrations without design review.
- After transport or relocation, inspect frame alignment, connections, floor, panels, seals, electricals and services before use.
- Arrange electrical testing and specialist fire, acoustic, plumbing or structural inspection where the project requires it.

Approved configuration	Final general arrangement, opening schedule, service layout and selected finish schedule.
Technical schedule	Final bill of materials or approved technical schedule identifying product-specific selections and approved deviations.
Quality records	Pre-dispatch inspection or acceptance record, dimensional checks and functional checks included in the agreed scope.
Care and warranty	Handling, touch-up and maintenance guidance together with final warranty period, scope, exclusions and claim process.

Labor Hutments FAQs

What is the intended use of this product?

Compact worker sleeping units for small crews and phased site mobilization. This page distinguishes simple hutments from open labor sheds and full prefab camps by using smaller footprints, one-room or two-room planning, modest services, direct cross-ventilation and optional relocation-oriented floor systems.

What structural base is specified?

The structural base follows the controlled workbook baseline: IS 2062 or approved equivalent MS channel/RHS/formed sections; exact member sizes and support reactions from the signed structural drawing.. Final member sizing, support reactions and handling provisions remain subject to the signed drawing.

What wall, roof and insulation system is specified?

Exterior wall: Budget tier: GI/PPGI sheet with bracing/liner as specified; insulated tier: nominal 30-40 mm PUF panel, with 40-60 mm range only where the signed BOM selects it. Roof: Profiled PPGI/GI sheet or insulated roof panel on light framing, with roof fall, side flashing, weatherhood at the door and optional gutter. Wall insulation: None/liner for GI budget option or nominal 30-40 mm PUF for insulated option; higher thickness only by climate/contract. Roof insulation: 30-40 mm insulated roof panel or light roof plus approved radiant/insulation layer where specified.

How are electrical systems controlled?

Wiring baseline: Typical references: 1.5 sq.mm lighting, 2.5 sq.mm socket circuits and 4 sq.mm AC/high-load circuits; final cable sizing follows connected load, voltage drop and protection coordination. Protection baseline: Main isolator, MCB/RCBO or RCCB protection, labelled neutral/earth bars, bonding and surge protection where required by the supply/risk assessment. Final circuit quantities, load schedule, earthing and equipment points follow the approved electrical drawing.

How is the published price calculated?

The workbook applies the control rate, area-band rule and 18 per cent GST to the published size schedule. For the first listed size, 10x10 ft gives a block price of INR 87,975 before GST and INR 1,03,810 including GST.

What should be confirmed before ordering?

Confirm size, layout, openings, services, utilities, transport, unloading, foundation/supports, optional items, taxes and final quotation validity.

Document Control and Contact

Document ID	SP-LC-HUT-TS-R1
Document title	Labor Hutments - Technical Specification, Sizes and Budgetary Price Guide
Revision	Rev 1 15 August 2026
Technical source	SAMAN Labour Colony controlled technical and pricing workbook; 30 technical lines and six published size configurations.
Commercial basis	Cost Estimation Input control rate INR 765/sq.ft.; workbook area-band multipliers; 18 per cent GST in final estimated prices.
Costing status	Approved - inherited SAMAN controlled planning rate
Technical reviewer	PENDING - name, designation, signature and date
SEO / editorial reviewer	PENDING - name and date
Document status	DRAFT - not released until both reviewer fields above are signed
Size ladder basis	Controlled workbook six-size schedule
Not for construction	Illustrative and budgetary only. Not for construction unless approved.
Document owner	SAMAN Portable SAMAN POS India Private Limited
Request a project quotation	South / Bengaluru: +91 88616 22859 sales@samanportable.com; North / Greater Noida: +91 87960 39938 ncr@samanportable.com

Final control note

Final drawings, engineering calculations, bill of materials, performance certificates, warranty terms, logistics scope and commercial quotation supersede this selection guide for the specific order. Do not infer a fire, acoustic, structural, corrosion or thermal performance rating unless it is stated and supported for the exact supplied assembly.