



PORTA CABINS

Approved price, construction and GA reference

20 x 10 x 8.5 ft reference

INR 2,50,000 ex-GST

CURRENT APPROVED AUTHORITY

SAMAN_Porta_Cabins_11_Products_
6_Sizes_Priced_Revised.xlsx

Approved Price Reference

Current workbook values are reproduced without adjustment. Transport and installation are quoted separately.

REFERENCE SIZE

20 x 10 x 8.5 ft

AREA

200 sq.ft.

BASE RATE

INR 1,250 / sq.ft.

BASE PRICE

INR 2,50,000 ex-GST

GST

18%

SIZE	AREA	ADJUSTED RATE	PRICE EX-GST	PRICE INCL. 18% GST
10 x 10 x 8.5 ft	100 sq.ft.	INR 1,437.50 / sq.ft.	INR 1,43,750	INR 1,69,625
20 x 8 x 8.5 ft	160 sq.ft.	INR 1,375 / sq.ft.	INR 2,20,000	INR 2,59,600
20 x 10 x 8.5 ft	200 sq.ft.	INR 1,250 / sq.ft.	INR 2,50,000	INR 2,95,000
20 x 12 x 8.5 ft	240 sq.ft.	INR 1,200 / sq.ft.	INR 2,88,000	INR 3,39,840
30 x 10 x 8.5 ft	300 sq.ft.	INR 1,200 / sq.ft.	INR 3,60,000	INR 4,24,800
40 x 10 x 8.5 ft	400 sq.ft.	INR 1,187.50 / sq.ft.	INR 4,75,000	INR 5,60,500

COMMERCIAL NOTES

- Cabin prices shown above exclude GST; the final column includes GST at 18%.
- Transport, unloading, placement, installation and optional project items are quoted separately.
- The final signed quotation governs scope, rate, taxes, delivery and site-specific requirements.
- The price ladder follows the approved workbook. The GA appendix reproduces the six currently approved project drawings.

Construction Specification

Authoritative values from the latest approved Porta Cabins workbook.

SYSTEM	APPROVED SPECIFICATION	BUYER PURPOSE
Bottom frame	100 x 50 x 3 mm MS C-channel primary base	Primary load-bearing chassis
Bottom stiffeners	100 x 50 channels, 50 x 50 angles, 75 x 40 channels and approved square-pipe supports	Base stiffness and load transfer
Floor frame	MS base/cross-member grid supporting 18 mm Bison board	Supports the finished floor system
Top frame	50 x 50 x 1.6 mm MS square-pipe perimeter	Ties walls and roof together
Roof stiffeners	50 x 50 x 1.2 mm MS square-pipe plus approved secondary members	Roof support and drainage slope
Posts	50 x 50 x 2 mm MS square pipe or approved 60 x 60 mm angle alternative	Corner, wall and opening support
Exterior wall	1.2 mm specially corrugated MS sheet	Durable weather-facing envelope
Roof sheet	1.4 mm corrugated MS sheet	Non-ISO sloped roof skin
Insulation	25 mm glass wool or 12 mm Heatlon walls; 50 mm glass wool roof, nominal 42 kg/m3	Thermal and acoustic comfort
Interior lining	8 mm pre-laminated MDF with aluminium joint sections	Clean office-grade finish
Ceiling	8 mm pre-laminated MDF ceiling	Neat service-integrated ceiling
Floor	18 mm Bison panel with 1.3 mm vinyl finish	Stable, maintainable office floor
Coating	Approved substrate-compatible primer/topcoat and touch-up system	Corrosion protection
Sealing	Compatible fasteners, EPDM/butyl washers, closures and approved PU/silicone seals	Continuous weather seal

Office Fit-Out and Quality Controls

Buyer-readable scope summary; final project schedules govern all selections and loads.

DOORS + WINDOWS

- 7 x 3 ft externally opening MS-framed door using 30 x 30 mm MS tubular sections.
- Two-track powder-coated aluminium sliding windows with 4 mm glass.
- Grills or mesh only where the approved schedule or site requirement calls for them.
- Openings are reinforced, aligned, operated and weather-seal checked before dispatch.

ELECTRICAL + VENTILATION

- Concealed copper: 1.5 sq.mm lighting, 2.5 sq.mm sockets, 4 sq.mm higher-load/AC circuits.
- DB with main isolation, MCB/RCCB protection, earthing and circuit segregation.
- LED lighting, 6A/16A sockets, computer/data and UPS provision.
- Cross ventilation, fan points and split-AC provision to the approved load schedule.

FABRICATION + QA

- Welded MS fabrication with cleaned joints, dimensional inspection and coating touch-up.
- Verify members, welds, coating, drainage, weather seals, doors and windows.
- Electrical continuity, insulation resistance, polarity, RCCB operation and earthing tests.
- Designed lifting lugs and support points only; approved handling drawing governs.

Plumbing is excluded unless specifically scheduled. Final signed quotation and approved project drawings define project scope.

Porta-Cabin Frame and Corrugated Sheet Assembly

Three-stage buyer diagram. Execution remains subject to approved shop drawings and qualified trades.




Porta-Cabin Frame & Corrugated Sheet Assembly

Three controlled stages from MS member alignment to a sealed weather envelope

DETAIL 01

1 Prepare & align

Cut, deburr, square and clamp

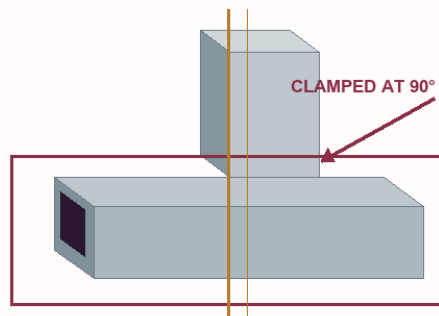


CHECK BEFORE TACKING

- ✓ Drawing dimensions and member sizes
- ✓ Square, level and diagonal
- ✓ Clean, tight contact surfaces

Approved member schedule governs
100×50×3 base • 50×50 frame family

2 Tack, verify & weld

Opposed tacks before final welding

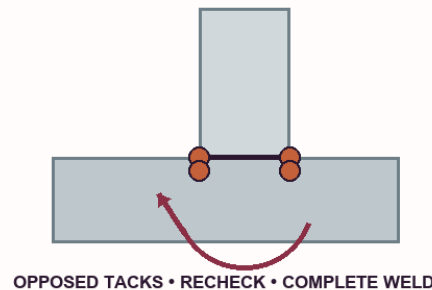


CONTINUOUS CLEAN WELD BEAD

- ✓ Tack opposite faces to control pull
- ✓ Verify square and diagonal again
- ✓ Weld to approved procedure; clean joint

3 Prime, seal & fix

Protect steel and weather-seal sheet

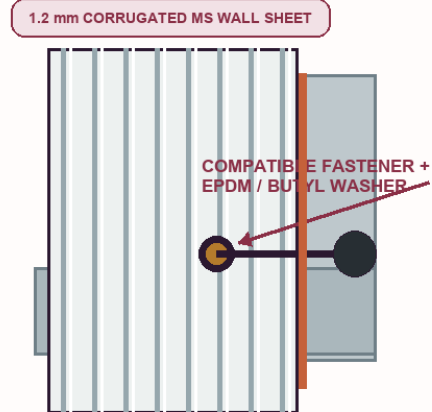

WEATHER-SEAL THE ENVELOPE

- ✓ Approved primer/topcoat system to exposure
- ✓ Keep sheet plumb; maintain rib alignment
- ✓ Use closures and PU/silicone where detailed

Seal path must remain continuous

Fabrication must follow approved shop drawings, qualified welding procedures and project QA requirements.

samanportable.com

Window, Electrical and Fan Installation

Three-stage buyer diagram. Execution remains subject to approved shop drawings and qualified trades.




Porta-Cabin Window, Electrical & Fan Installation

Three coordinated stages for a sealed opening, protected circuits and tested services

DETAIL 02

1 Set the window

Reinforce, level, anchor and seal

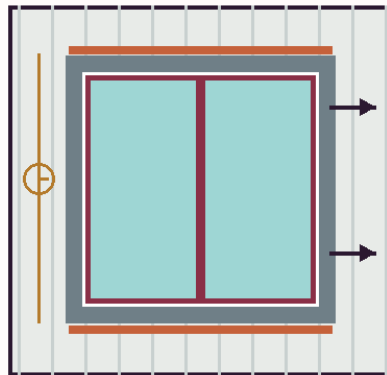


2-TRACK POWDER-COATED ALUMINIUM • 4 mm GLASS

- ✓ Reinforce the opening to approved drawing
- ✓ Set frame level, plumb and square
- ✓ Anchor, flash and seal the full perimeter

Operate sash and verify weather seal

2 Distribute power


Protected, segregated concealed circuits

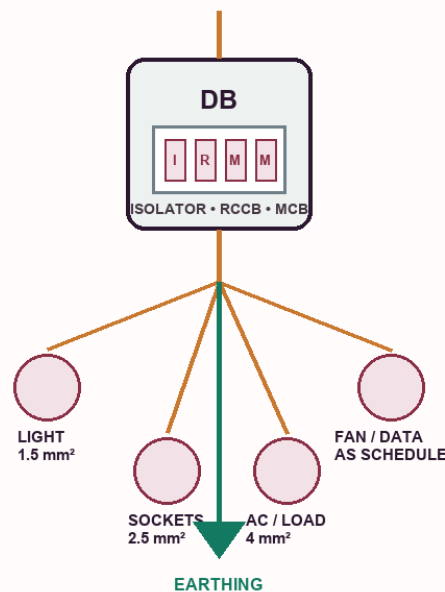

- ✓ Concealed copper wiring only
- ✓ Segregate lighting, sockets and AC/load
- ✓ Final load schedule and DB rating govern

3 Install & test

Fan, light, outlets and AC provision

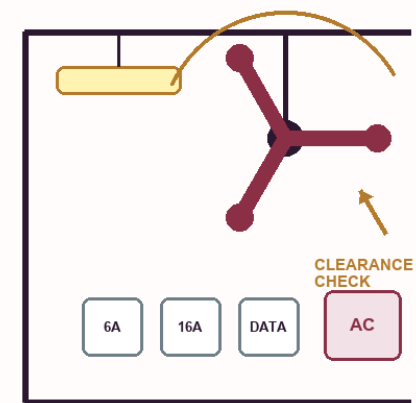

- Continuity & earthing
- ✓ Insulation resistance
- ✓ Polarity & RCCB trip

Licensed electrician and final schedule govern

Conceptual buyer diagram only. Approved electrical drawings, load schedule and licensed installation govern execution.

samanportable.com

Approved GA Drawing - 10 x 10 x 8.5 ft

The approved board is reproduced without mirroring, rebalancing or geometric modification.



VERIFIED CONFIGURATION

EXTERNAL SIZE
10 x 10 x 8.5 ft

EXTERNAL DOORS
1

INTERNAL DOORS
0

WINDOWS
3

WORKSTATIONS
4

PARTITIONS
0

SEATS
4

CABINETS
4

ROOF FAMILY
Non-ISO Sloped Porta-Cabin Roof

COLOUR MODE
Professional single tone

TECHNICAL QA: PASS

Approved GA Drawing - 20 x 8 x 8.5 ft

The approved board is reproduced without mirroring, rebalancing or geometric modification.



VERIFIED CONFIGURATION

EXTERNAL SIZE

20 x 8 x 8.5 ft

EXTERNAL DOORS

1

INTERNAL DOORS

0

WINDOWS

4

WORKSTATIONS

3

PARTITIONS

0

SEATS

3

CABINETS

3

ROOF FAMILY

Non-ISO Sloped Porta-Cabin Roof


COLOUR MODE

Professional single tone

TECHNICAL QA: PASS

Approved GA Drawing - 20 x 10 x 8.5 ft

The approved board is reproduced without mirroring, rebalancing or geometric modification.

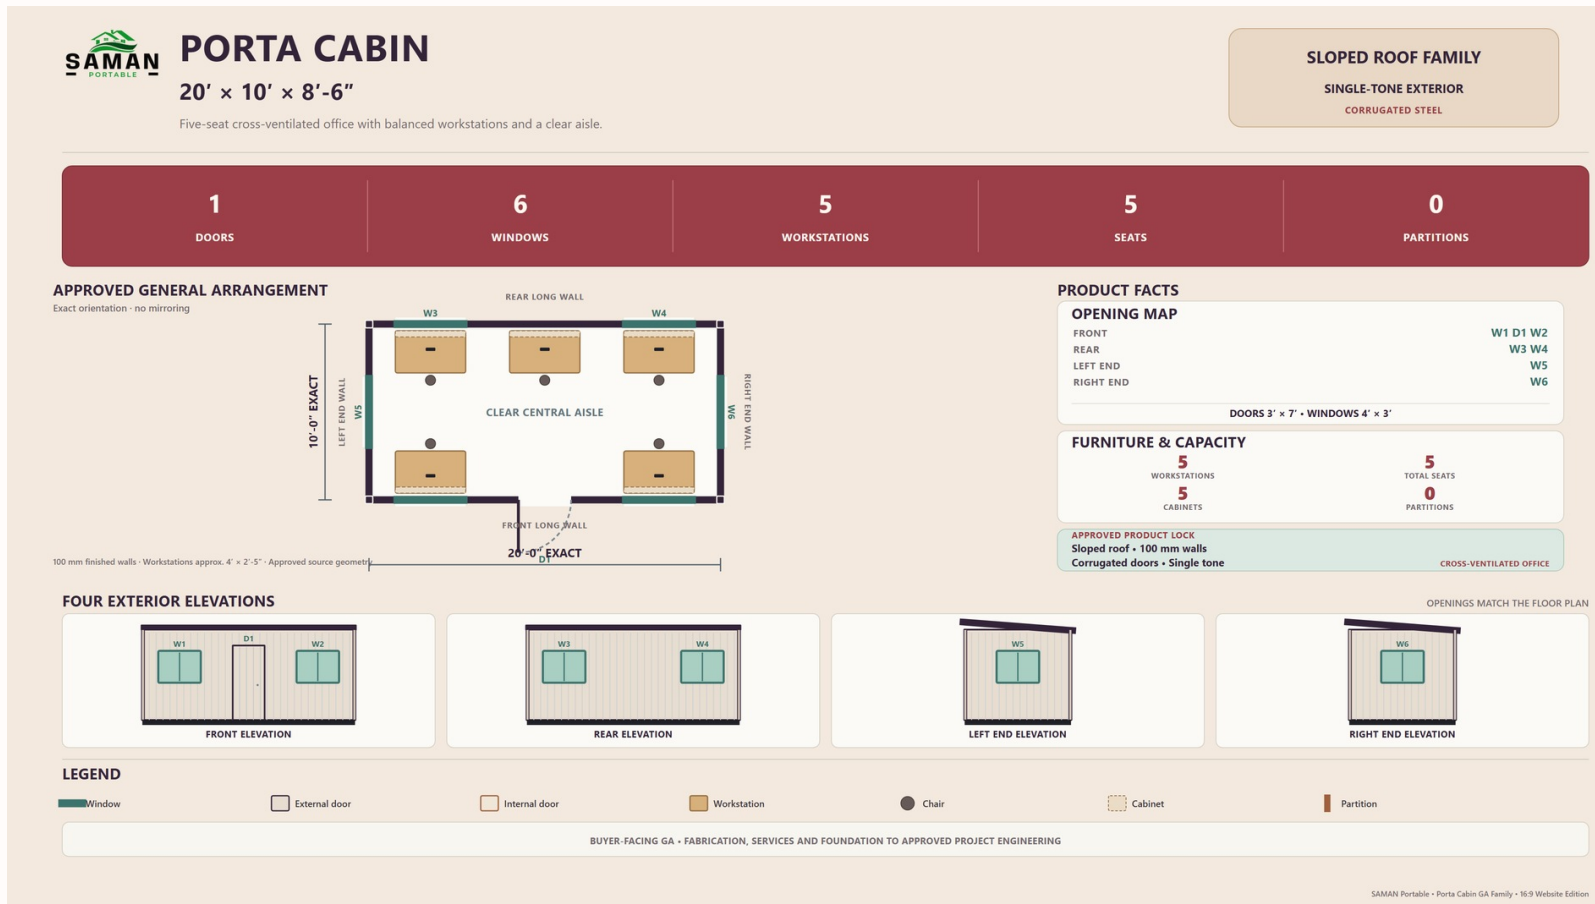

VERIFIED CONFIGURATION

EXTERNAL SIZE
20 x 10 x 8.5 ft

EXTERNAL DOORS
1

INTERNAL DOORS
0

WINDOWS
6

WORKSTATIONS
5

PARTITIONS
0

SEATS
5

CABINETS
5


ROOF FAMILY
Non-ISO Sloped Porta-Cabin Roof

COLOUR MODE
Professional single tone

TECHNICAL QA: PASS

Approved GA Drawing - 20 x 12 x 8.5 ft

The approved board is reproduced without mirroring, rebalancing or geometric modification.

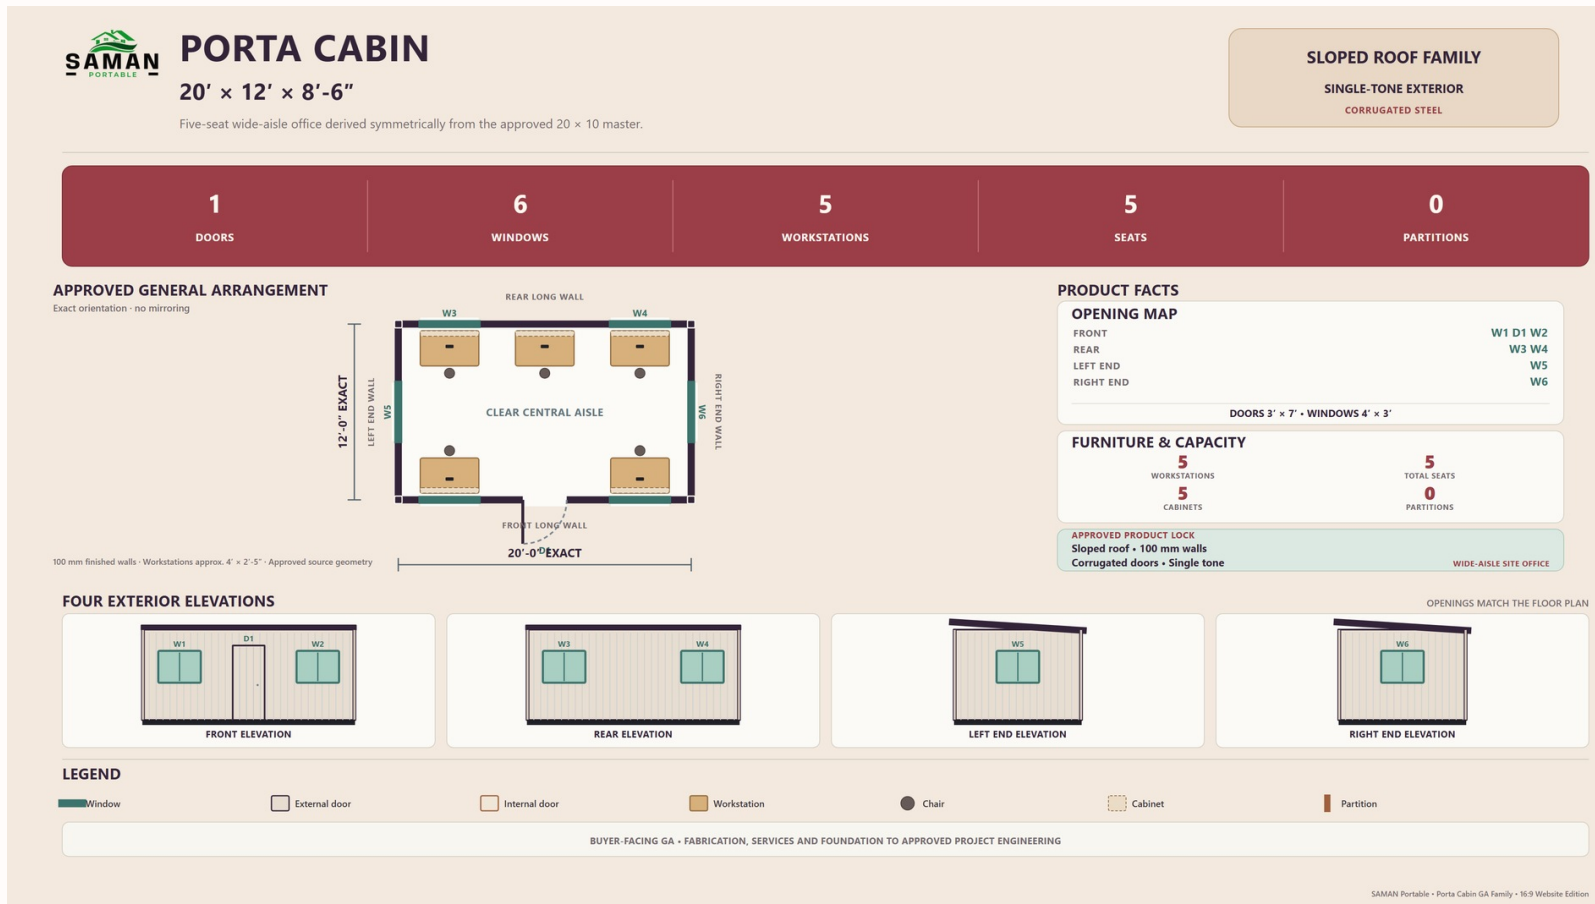

VERIFIED CONFIGURATION

EXTERNAL SIZE
20 x 12 x 8.5 ft

EXTERNAL DOORS
1

INTERNAL DOORS
0

WINDOWS
6

WORKSTATIONS
5

PARTITIONS
0

SEATS
5

CABINETS
5


ROOF FAMILY
Non-ISO Sloped Porta-Cabin Roof

COLOUR MODE
Professional single tone

TECHNICAL QA: PASS

Approved GA Drawing - 30 x 10 x 8.5 ft

The approved board is reproduced without mirroring, rebalancing or geometric modification.

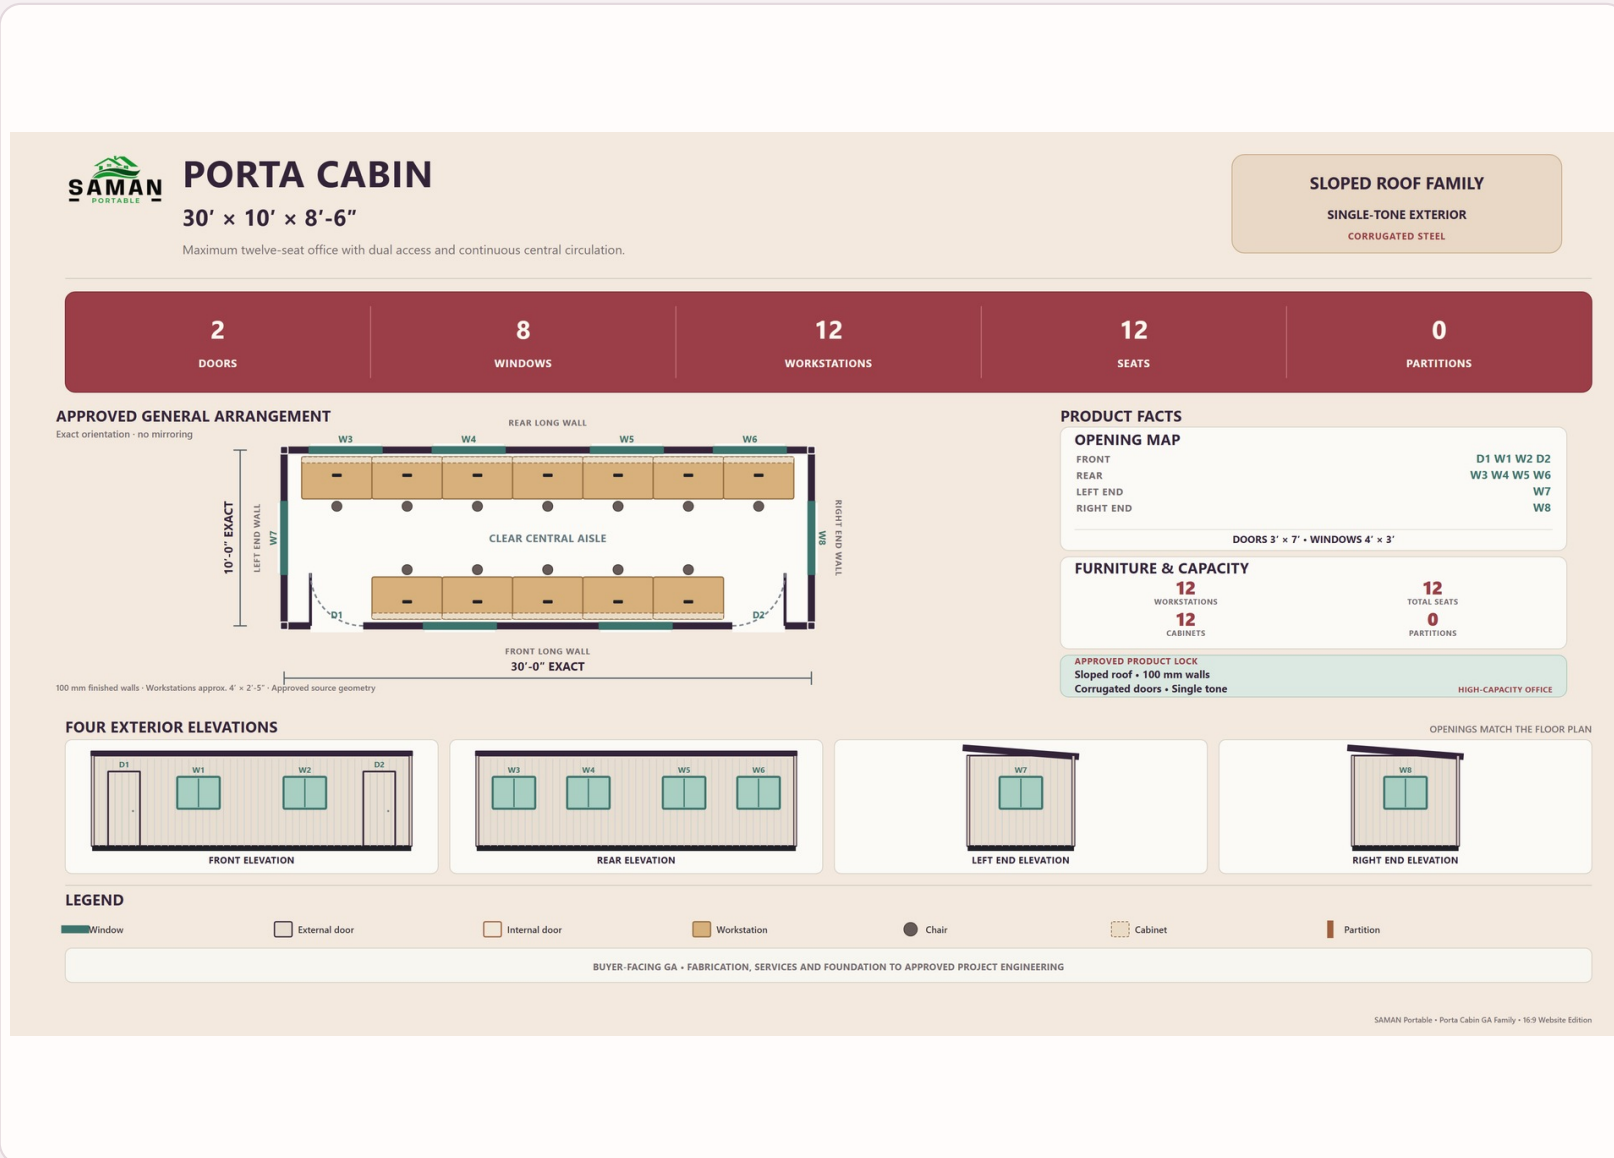

VERIFIED CONFIGURATION

EXTERNAL SIZE
30 x 10 x 8.5 ft

EXTERNAL DOORS
2

INTERNAL DOORS
0

WINDOWS
8

WORKSTATIONS
12

PARTITIONS
0

SEATS
12

CABINETS
12

ROOF FAMILY
Non-ISO Sloped Porta-Cabin Roof

COLOUR MODE
Professional single tone

TECHNICAL QA: PASS

Approved GA Drawing - 40 x 10 x 8.5 ft

The approved board is reproduced without mirroring, rebalancing or geometric modification.



VERIFIED CONFIGURATION

EXTERNAL SIZE
40 x 10 x 8.5 ft

EXTERNAL DOORS
2

INTERNAL DOORS
1

WINDOWS
10

WORKSTATIONS
12

PARTITIONS
1

SEATS
15

CABINETS
12

ROOF FAMILY
Non-ISO Sloped Porta-Cabin Roof

COLOUR MODE
Professional single tone

TECHNICAL QA: PASS

How to Use This Technical Pack

Use the specification, diagrams and GA boards together when discussing a project requirement.

1**1. SELECT A SIZE**

Choose the required footprint and compare the approved GA layouts. The six GA pages reproduce the project drawings currently available in this product folder.

2**2. CONFIRM PROJECT SCOPE**

Confirm doors, windows, workstations, electrical load, AC provision, site access, lifting and support-point requirements.

3**3. REQUEST FINAL QUOTATION**

The approved workbook price ladder is the current reference. GST, transport, unloading, placement, installation and options are confirmed in the signed quotation.

4**4. APPROVE PROJECT DRAWINGS**

Fabrication starts only against the approved project drawing, service schedule and engineering documents. Never use a buyer diagram as a shop drawing.

SAMAN PORTABLE - PORTA CABINS

Product page: samanportable.com/product/porta-cabins

Current source control: latest approved workbook in the product folder

TECHNICAL REFERENCE V1