

Readymade Office Cabin

Approved six-size technical specification and workbook-linked price dashboard | Ruleset 1.0.14

READY-DISPATCH OFFICE CABIN FAMILY

Six approved sizes • 8.5 ft nominal height • Sloped roof family

Prices below are taken from the supplied workbook. GST shown at 18%.

Size	Area	Rate / sq.ft.	Ex GST	Incl GST	Roof
10 × 10 × 8.5 ft	100 sq.ft.	Rs 1,437.50	Rs 143,750	Rs 169,625	centred-ridge two-way slope
20 × 8 × 8.5 ft	160 sq.ft.	Rs 1,375.00	Rs 220,000	Rs 259,600	one-way slope
20 × 10 × 8.5 ft	200 sq.ft.	Rs 1,250.00	Rs 250,000	Rs 295,000	centred-ridge two-way slope
20 × 12 × 8.5 ft	240 sq.ft.	Rs 1,200.00	Rs 288,000	Rs 339,840	centred-ridge two-way slope
30 × 10 × 8.5 ft	300 sq.ft.	Rs 1,200.00	Rs 360,000	Rs 424,800	centred-ridge two-way slope
40 × 10 × 8.5 ft	400 sq.ft.	Rs 1,187.50	Rs 475,000	Rs 560,500	centred-ridge two-way slope

Workbook base rate: Rs 1,250.00/sq.ft. at 200 sq.ft. | GST: 18%

Price boundary: stock specification controls price; custom openings, premium finishes, sanitary work and repeated relocation are separately quoted.

Workbook-controlled technical scope

No numeric structural member sizes or material thicknesses are added because the workbook does not state them.

Structural frame

Controlled bottom/top frame, floor support grid, roof stiffeners, corner posts and opening geometry; release only against the final approved GA.

Electrical services

Protected routing, identified circuits/device points, fixing check and functional handover record; final schedule remains quotation controlled.

Fabrication

Controlled weld sequence, visual inspection, cleaning and protective-coating preparation with recorded factory QA.

Openings and hardware

Door/window coordinates remain GA controlled. End walls carry exactly one centred window and no external door.

Envelope and roof

Weather skin, laps, trims, drainage edge and sealed penetrations. 8-ft width uses one-way slope; 10/12-ft width uses centred-ridge two-way slope.

Handling and placement

Support condition, placement access, movement method and site coordination must be frozen before dispatch; no lifting-capacity claim is made.

Interior finish

Factory-finished lining, floor, ceiling, approved furniture layout and ceiling-flush storage, checked against opening locations.

Factory handover

Batch register, finish sample, fixing/sealing checks, inventory hold point, dispatch checklist and exclusions record.

Engineering boundary

This document supports product selection and quotation. It does not verify structural calculations, member adequacy, certification, code compliance or lifting capacity.

Approved size and layout matrix

Geometry summary from the approved size ledger; final manufacture remains drawing and quotation controlled.

Size	Roof	Doors ext/int	Windows	Workstations	Seats	Layout
10 × 10 × 8.5 ft	centred-ridge two-way slope 1 / 0		3	4	4	compact 4-workstation
20 × 8 × 8.5 ft	one-way slope	1 / 0	6	3	3	narrow; Wall A clear
20 × 10 × 8.5 ft	centred-ridge two-way slope 1 / 0		6	5	5	5-workstation office
20 × 12 × 8.5 ft	centred-ridge two-way slope 1 / 0		6	5	5	20x10 widened; 5 stations
30 × 10 × 8.5 ft	centred-ridge two-way slope 2 / 0		8	8	8	standard 8-workstation
40 × 10 × 8.5 ft	centred-ridge two-way slope 2 / 1		9	12	15	10x10 manager + 30x10 office

30×10 uses the user-confirmed standard eight-workstation plan. 40×10 includes one 10×10 manager room plus a 30×10 common office.

01 Readymade Office Frame Joint Diagram

Technical control diagram

Frame joint and weather-skin sequence

Production-control illustration — dimensions and member sections remain quotation/drawing controlled


1 Align and hold

- Confirm approved GA and wall identity
- Set frame on level controlled supports
- Check opening coordinates before tacking



2 Tack, verify, weld

- Tack in controlled sequence
- Re-check square, level and diagonals
- Complete welds; visually inspect and clean

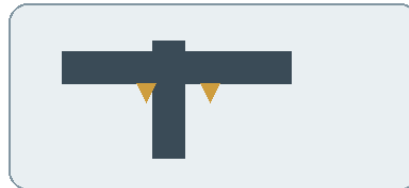

3 Prime, seal, clad

- Prepare steel before protective coating
- Fix roof/wall skin to controlled lines
- Seal laps, trims and penetrations



Engineering boundary: This diagram explains control steps; it does not certify weld size, member adequacy, code compliance or lifting capacity.

02 Readymade Office Window Electrical Diagram


Technical control diagram

Window sealing and protected electrical services

Factory QA illustration — final circuit schedule and service entry remain quotation/drawing controlled

1 Window and envelope control

- Keep GA opening coordinate and level
- Continuous perimeter seal and drip trim
- Inspect frame fixing, drainage and closure

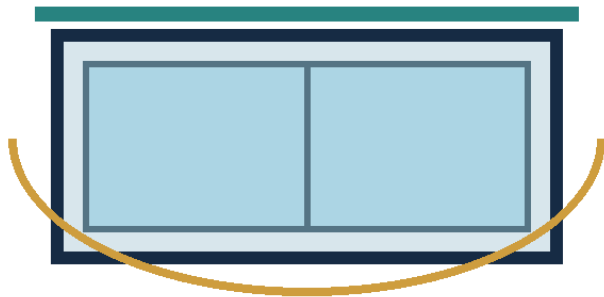

2 Electrical and handover control

- Protected cable route; no sharp-edge contact
- Circuit identification and device fixing check
- Functional test and record before dispatch



QA boundary: Final inclusion, ratings, circuit schedule and site connection depend on the signed quotation, approved drawing and agreed scope.

Approved GA — 10 × 10 × 8.5 ft


four-workstation compact office | centred-ridge two-way slope

SAMAN PORTABLE

READYMADE OFFICE CABIN

10 × 10 × 8'-6" | four-workstation compact office | Ruleset 1.0.13

BUYER-FACING GENERAL ARRANGEMENT

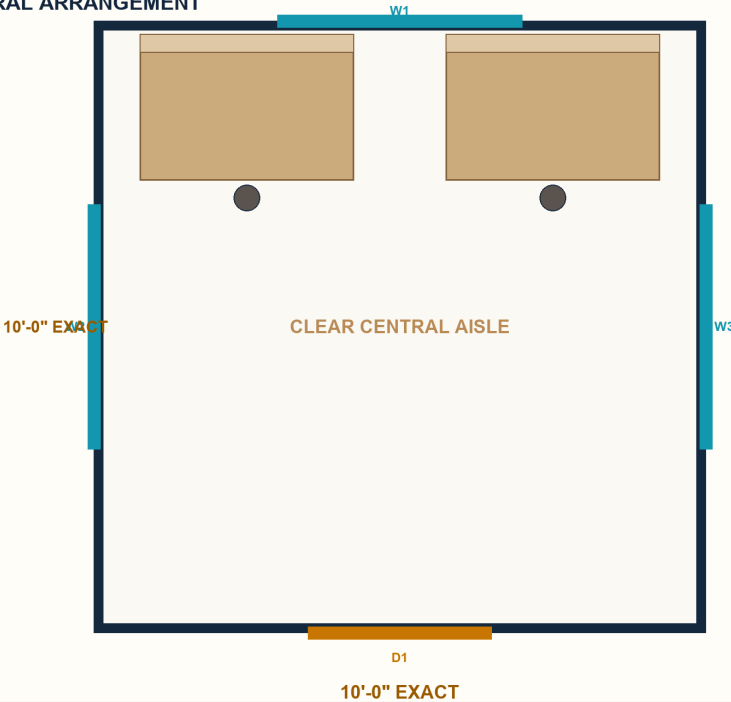

CONFIGURATION LOCK

External size: 10 × 10 × 8.5 ft
Roof: centred-ridge two-way slope
External doors: 1 | Internal doors: 0
Windows: 3 | Workstations: 4 | Seats: 4
Partitions: 0
Exterior: Burgundy Wine (EX-06)
Interior: Porcelain Sage (IN-04)

OPENING & FURNITURE SCHEDULE

Wall A: D1 | none | Wall B: W1 | 2 workstations and 2 ceiling-flush cabinets | Wall C: W2 | 1 workstation and 1 ceiling-flush cabinet | Wall D: W3 | 1 workstation and 1 ceiling-flush cabinet

WORKBOOK-CONTROLLED PRICE


Adjusted rate: ₹1,437.50/sq.ft.
Cabin price ex GST: ₹143,750
GST: 18%
Cabin price incl GST: ₹169,625

Budgetary reference; signed quotation governs scope.


ORTHOGRAPHIC EXTERIOR ELEVATIONS




WALL A



WALL B



END C



END D

Buyer-facing General Arrangement drawing. Structural member sizes, fabrication details, services and foundation/interface engineering are governed by approved project engineering documents unless specifically shown.

Approved GA — 20 × 8 × 8.5 ft


narrow office, Wall A furniture-free | one-way slope

SAMAN PORTABLE

READYMADE OFFICE CABIN

20 × 8 × 8'-6" | narrow office, Wall A furniture-free | Ruleset 1.0.13

BUYER-FACING GENERAL ARRANGEMENT

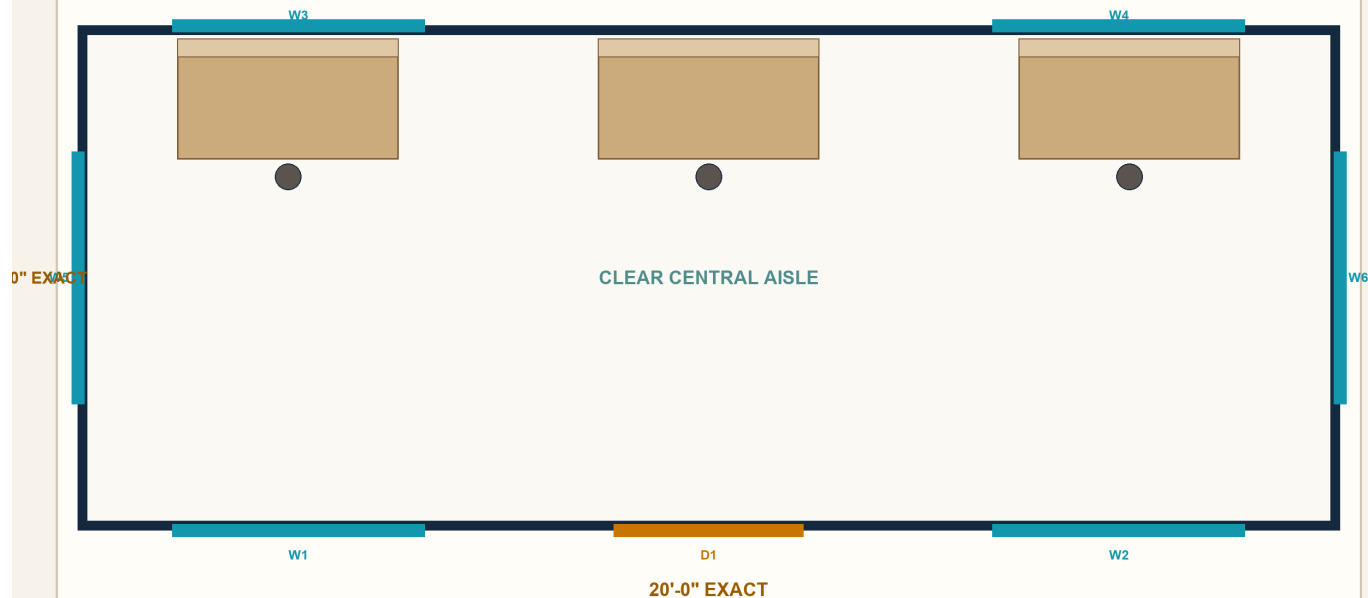

CONFIGURATION LOCK

External size: 20 × 8 × 8.5 ft
Roof: one-way slope
External doors: 1 | Internal doors: 0
Windows: 6 | Workstations: 3 | Seats: 3
Partitions: 0
Exterior: Slate Blue-Grey (EX-07)
Interior: Champagne Cream (IN-02)

OPENING & FURNITURE SCHEDULE

Wall A: W1 - D1 - W2 | none; entrance clear | Wall
B: W3 - W4 | 3 workstations and 3 ceiling-flush
cabinets | End C: W5 | none | End D: W6 | none

WORKBOOK-CONTROLLED PRICE


Adjusted rate: ₹1,375.00/sq.ft.
Cabin price ex GST: ₹220,000
GST: 18%
Cabin price incl GST: ₹259,600

Budgetary reference; signed quotation governs scope.


ORTHOGRAPHIC EXTERIOR ELEVATIONS




WALL A

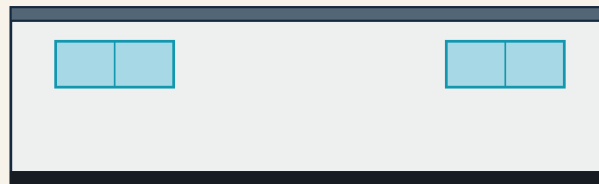

WALL B

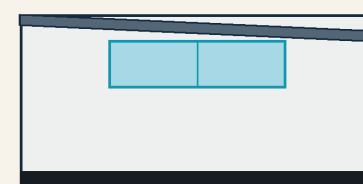

END C

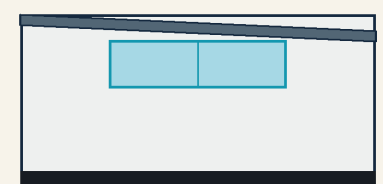

END D

Buyer-facing General Arrangement drawing. Structural member sizes, fabrication details, services and foundation/interface engineering are governed by approved project engineering documents unless specifically shown.

Approved GA — 20 × 10 × 8.5 ft


five-workstation office | centred-ridge two-way slope

SAMAN PORTABLE

READYMADE OFFICE CABIN

20 × 10 × 8'-6" | five-workstation office | Ruleset 1.0.13

BUYER-FACING GENERAL ARRANGEMENT

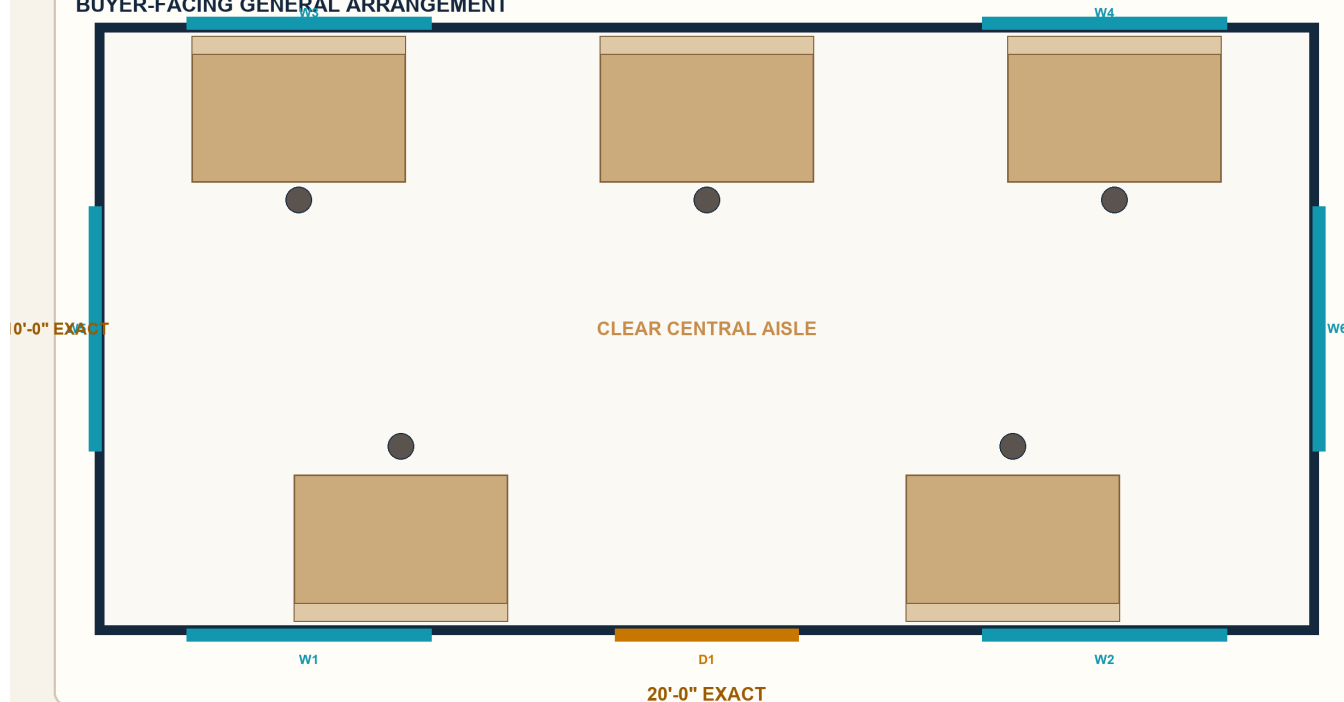

CONFIGURATION LOCK

External size: 20 × 10 × 8.5 ft
Roof: centred-ridge two-way slope
External doors: 1 | Internal doors: 0
Windows: 6 | Workstations: 5 | Seats: 5
Partitions: 0
Exterior: Muted Teal (EX-12)
Interior: Soft Clay Greige (IN-10)

OPENING & FURNITURE SCHEDULE


Wall A: W1 - D1 - W2 | 2 workstations and 2 ceiling-flush cabinets; entrance clear | Wall B: W3 - W4 | 3 workstations and 3 ceiling-flush cabinets | End C: W5 | none | End D: W6 | none

WORKBOOK-CONTROLLED PRICE


Adjusted rate: ₹1,250.00/sq.ft.
Cabin price ex GST: ₹250,000
GST: 18%
Cabin price incl GST: ₹295,000

Budgetary reference; signed quotation governs scope.


ORTHOGRAPHIC EXTERIOR ELEVATIONS

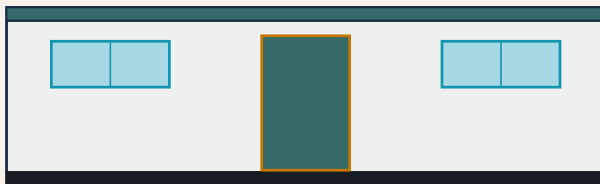


WALL A

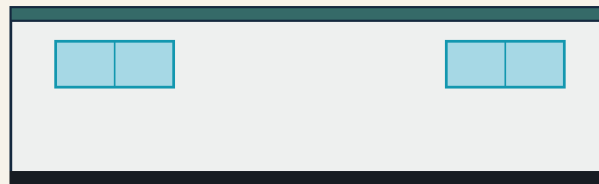

WALL B

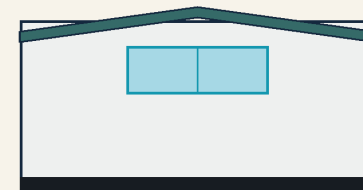

END C

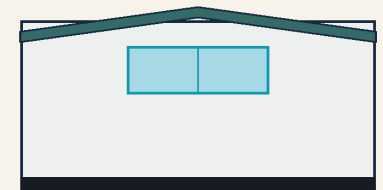

END D

Buyer-facing General Arrangement drawing. Structural member sizes, fabrication details, services and foundation/interface engineering are governed by approved project engineering documents unless specifically shown.

Approved GA — 20 × 12 × 8.5 ft

20x10 layout widened symmetrically; clear aisle only | centred-ridge two-way slope

SAMAN PORTABLE

READYMADE OFFICE CABIN

20 × 12 × 8'-6" | 20x10 layout widened symmetrically; clear aisle only | Ruleset 1.0.13

BUYER-FACING GENERAL ARRANGEMENT



CONFIGURATION LOCK

External size: 20 × 12 × 8.5 ft
Roof: centred-ridge two-way slope
External doors: 1 | Internal doors: 0
Windows: 6 | Workstations: 5 | Seats: 5
Partitions: 0
Exterior: Warm Stone Taupe (EX-04)
Interior: Mist Blue-Grey (IN-05)

OPENING & FURNITURE SCHEDULE


Wall A: W1 - D1 - W2 | 2 workstations and 2 ceiling-flush cabinets; entrance clear | Wall B: W3 - W4 | 3 workstations and 3 ceiling-flush cabinets | End C: W5 | none | End D: W6 | none

WORKBOOK-CONTROLLED PRICE


Adjusted rate: ₹1,200.00/sq.ft.
Cabin price ex GST: ₹288,000
GST: 18%
Cabin price incl GST: ₹339,840

Budgetary reference; signed quotation governs scope.


ORTHOGRAPHIC EXTERIOR ELEVATIONS

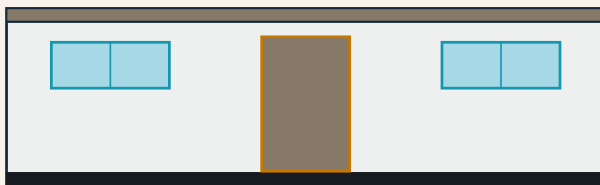


WALL A

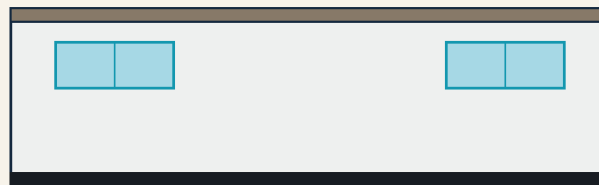

WALL B

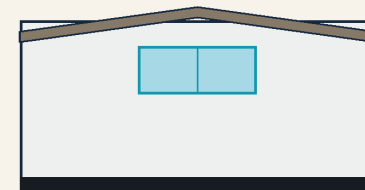

END C

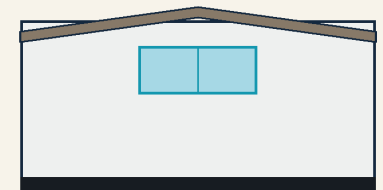

END D

Buyer-facing General Arrangement drawing. Structural member sizes, fabrication details, services and foundation/interface engineering are governed by approved project engineering documents unless specifically shown.

Approved GA — 30 × 10 × 8.5 ft


standard eight-workstation layout (user confirmed) | centred-ridge two-way slope

SAMAN PORTABLE

READYMADE OFFICE CABIN

30 × 10 × 8'-6" | standard eight-workstation layout (user confirmed) | Ruleset 1.0.13

BUYER-FACING GENERAL ARRANGEMENT

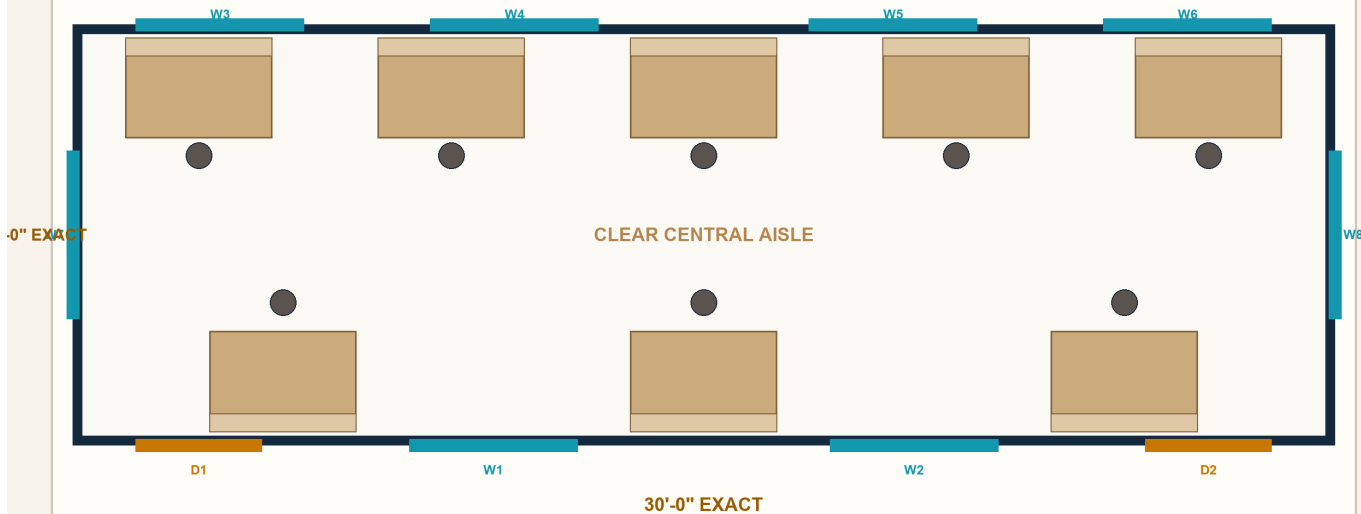

CONFIGURATION LOCK

External size: 30 × 10 × 8.5 ft
Roof: centred-ridge two-way slope
External doors: 2 | Internal doors: 0
Windows: 8 | Workstations: 8 | Seats: 8
Partitions: 0
Exterior: Deep Bottle Green (EX-05)
Interior: Champagne Linen (IN-11)

OPENING & FURNITURE SCHEDULE


Wall A: D1 - W1 - W2 - D2 | 3 workstations and 3 ceiling-flush cabinets | Wall B: W3 - W4 - W5 - W6 | 5 workstations and 5 ceiling-flush cabinets | End C: W7 | none | End D: W8 | none

WORKBOOK-CONTROLLED PRICE


Adjusted rate: ₹1,200.00/sq.ft.
Cabin price ex GST: ₹360,000
GST: 18%
Cabin price incl GST: ₹424,800

Budgetary reference; signed quotation governs scope.


ORTHOGRAPHIC EXTERIOR ELEVATIONS

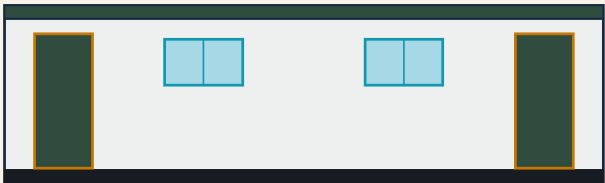


WALL A

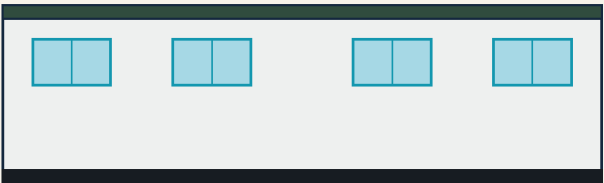

WALL B

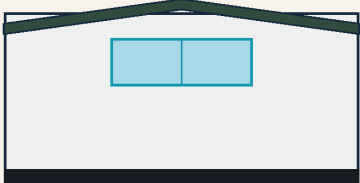

END C



END D

Buyer-facing General Arrangement drawing. Structural member sizes, fabrication details, services and foundation/interface engineering are governed by approved project engineering documents unless specifically shown.

Approved GA — 40 × 10 × 8.5 ft


10x10 manager room plus 30x10 common office | centred-ridge two-way slope

SAMAN PORTABLE

READYMADE OFFICE CABIN

40 × 10 × 8'-6" | 10x10 manager room plus 30x10 common office | Ruleset 1.0.13

BUYER-FACING GENERAL ARRANGEMENT

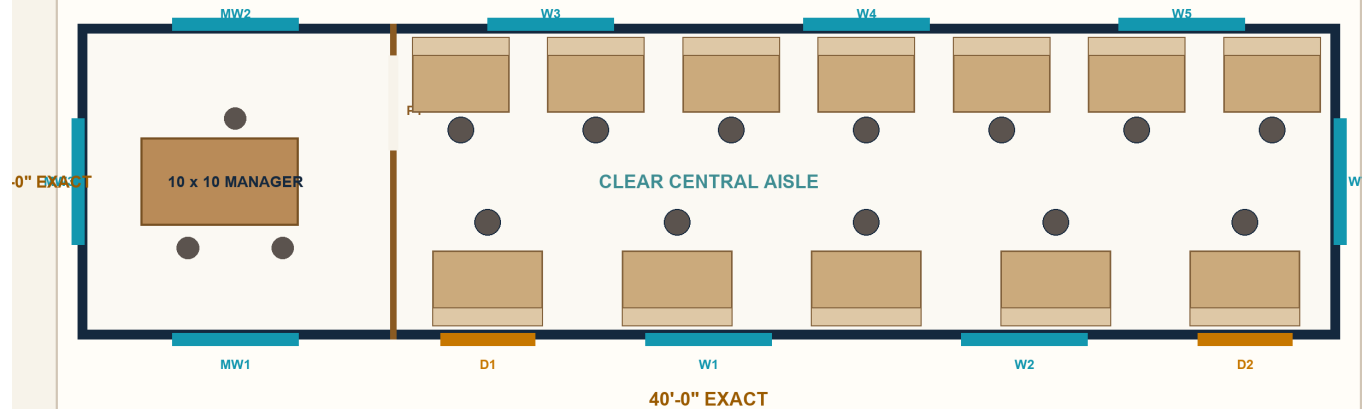

CONFIGURATION LOCK

External size: 40 × 10 × 8.5 ft
Roof: centred-ridge two-way slope
External doors: 2 | Internal doors: 1
Windows: 9 | Workstations: 12 | Seats: 15
Partitions: 1
Exterior: Deep Oxford Blue (EX-01)
Interior: Pale Sand (IN-08)

OPENING & FURNITURE SCHEDULE


Wall A: MW1 - D1 - W1 - W2 - D2 | 5 common workstations and 5 ceiling-flush cabinets; manager table clear of MW1 | Wall B: MW2 - W3 - W4 - W5 | 7 common workstations and 7 ceiling-flush cabinets | End C: MW3 | manager table, 1 manager chair, 2 guest chairs; no workstation run | End D: W7 | none | Partition at 10 ft: P1 | none; access clear

WORKBOOK-CONTROLLED PRICE

Adjusted rate: ₹1,187.50/sq.ft.
Cabin price ex GST: ₹475,000
GST: 18%
Cabin price incl GST: ₹560,500

Budgetary reference; signed quotation governs scope.


ORTHOGRAPHIC EXTERIOR ELEVATIONS

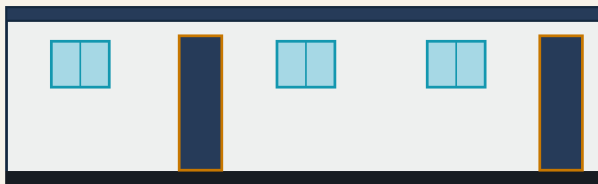

WALL A



WALL B

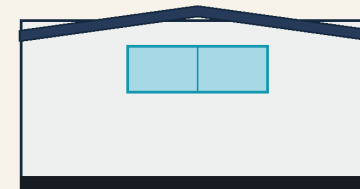

END C



END D

Buyer-facing General Arrangement drawing. Structural member sizes, fabrication details, services and foundation/interface engineering are governed by approved project engineering documents unless specifically shown.

Commercial and engineering boundaries

Source-control note for quotation and manufacture

Included control basis

Approved size, height, roof family, wall opening coordinates, locked furniture plan, workbook technical controls and workbook-calculated prices.

Separately quoted

Excluded unless signed: custom openings, premium finishes, sanitary work, repeated relocation, custom partitions and site-specific services.

Before production release

Freeze the final GA, wall identities, door swings, service entry, equipment loads, placement supports, unloading method and customer-supplied items.

No unsupported claim

No numeric member schedule, material thickness, structural adequacy, certification, code compliance or lifting capacity is claimed in this PDF.

Price use

The supplied workbook is the commercial authority. If its editable base-rate or GST cells change, this PDF must be rebuilt before issue.

Workbook: readymade-office-cabin-technical-specification-and-price-dashboard.xlsx

Generated: 2026-08-22 | Workbook SHA-256: e55a130a18dfcae6fcd22121cc0d02ed28ed65b91ae1f487e27d3f9276937f7b