

SAMAN POS India Pvt Ltd / TECHNICAL REFERENCE

Porta Cabins

Porta Cabins Technical Specification, Price and GA Reference

REVISION	STATUS	PRODUCT PAGE
PC01-TECH-SPEC-V1-2026-08-30	Current website technical reference	https://www.samanportable.com/product/porta-cabins

CONTROLLED SCOPE

Final project scope is governed by the accepted quotation and approved drawing.
This pack presents the current published selection data, the effective 30-row technical specification and the six approved GA reference boards.

HSN 9406 | GST 18% | All monetary values use Rs

01 Six-variant price and selection reference

SIZE	DIMENSIONS	AREA	RECOMMENDED OCCUPANCY	APPROX. COMPLETED WEIGHT	EX-GST	INCL. 18% GST
10x10 ft	10x10x8.5 ft	100 sq ft	2-3 people	1.5 tonnes	Rs 1,43,750	Rs 1,69,625
20x8 ft	20x8x8.5 ft	160 sq ft	3-4 people	2.4 tonnes	Rs 2,20,000	Rs 2,59,600
20x10 ft	20x10x8.5 ft	200 sq ft	4-6 people	3.0 tonnes	Rs 2,50,000	Rs 2,95,000
20x12 ft	20x12x8.5 ft	240 sq ft	5-7 people	3.6 tonnes	Rs 2,88,000	Rs 3,39,840
30x10 ft	30x10x8.5 ft	300 sq ft	6-8 people	4.5 tonnes	Rs 3,60,000	Rs 4,24,800
40x10 ft	40x10x8.5 ft	400 sq ft	8-10 people	6.0 tonnes	Rs 4,75,000	Rs 5,60,500

Approximate completed unit weights only. Actual completed weight varies with the approved configuration, fit-out and optional equipment. These figures are not floor, roof, lifting or structural load capacities.

COMMERCIAL BOUNDARY

- Prices shown are the currently published standard reference prices.
- Customisation and site-specific requirements are confirmed in an itemised quotation.
- Freight, unloading, foundation, utility connections and installation scope must be confirmed for the delivery location and final configuration.
- The final approved drawing and accepted quotation govern the supplied scope.

02.1 Effective technical specification (1 of 2)

CONTROL	COMPONENT	CURRENT EFFECTIVE REQUIREMENT
SPEC-01	Bottom frame	100×50×3 mm MS C-channel primary base frame, ISI-standard or approved equivalent, fabricated as the load-bearing chassis.
SPEC-02	Bottom stiffeners	100×50 mm C-channels, 50×50 mm MS angles, 75×40 mm channels and approved square-pipe supports, typically coordinated at about 4 ft intervals to the final floor load and lifting design.
SPEC-03	Floor frame	MS base and cross-member grid supporting an 18 mm Bison/cement-fibre floor board fixed with approved self-tapping fasteners; spacing follows the final drawing and design load.
SPEC-04	Top frame	50×50×1.6 mm MS square-pipe top perimeter frame of approved make or equivalent.
SPEC-05	Roof stiffeners	50×50×1.2 mm MS square-pipe roof stiffeners with 50×40, 40×40, 50×25 or 25×25 mm secondary members where required by span, ceiling support and drainage slope.
SPEC-06	Corner posts / walls	50×50×2 mm MS square-pipe corner and wall posts or approved 60×60 mm MS-angle alternative, with reinforced door and window openings and an approximately 60 mm wall cavity.
SPEC-07	Lifting / handling	Designed MS lifting hooks or lugs matched to the completed unit weight; handle only by the approved lifting and support-point drawing.
SPEC-08	Welding & fabrication	Welded MS fabrication with cleaned joints, safe edges, dimensional inspection and coating touch-up before panel closure and dispatch.
SPEC-09	Exterior walls	1.2 mm specially corrugated MS sheet
SPEC-10	Roof	1.4 mm corrugated MS sheet
SPEC-11	Interior walls	8 mm pre-laminated MDF board with aluminium joint sections
SPEC-12	Ceiling	8 mm pre-laminated MDF ceiling
SPEC-13	Floor base	18 mm Bison panel
SPEC-14	Floor finish	1.3 mm vinyl flooring
SPEC-15	Wall insulation	25 mm glass wool or 12 mm heatlon

02.2 Effective technical specification (2 of 2)

CONTROL	COMPONENT	CURRENT EFFECTIVE REQUIREMENT
SPEC-16	Roof insulation	50 mm glass wool, nominal density 42 kg/m ³
SPEC-17	Decorative / external finish	Standard anti-rust enamel exterior finish in an approved colour combination.
SPEC-18	Fasteners & sealing	Approved self-tapping fasteners at floor-board and panel fixings, with welded joints cleaned before panel closure. Weather sealing and roof drainage are verified at pre-dispatch inspection.
SPEC-19	Main door / service door	7×3 ft externally opening MS-framed door using 30×30 mm MS tubular sections
SPEC-20	Windows / service opening	Two-track powder-coated aluminium sliding windows with 4 mm glass
SPEC-21	Grills / mosquito mesh	Security grill, insect mesh, guard, louver or protection selected only where the approved use and opening schedule requires it.
SPEC-22	Electrical wiring	Concealed PVC-insulated copper wiring, typically 1.5 sq.mm lighting, 2.5 sq.mm sockets and 4 sq.mm higher-load or AC circuits, subject to the final load schedule.
SPEC-23	Electrical protection	Distribution board with MCB/RCCB protection, earthing and segregation of lighting, socket, wet-area and AC circuits according to the approved electrical drawing.
SPEC-24	Electrical fittings	LED lights, modular switches, 6A/16A sockets, fan points and AC provision according to the approved layout.
SPEC-25	Ventilation / AC	Natural cross ventilation with fan, exhaust and AC provision as required.
SPEC-26	Plumbing / sanitary	Not included unless shown in the approved scope.
SPEC-27	Layout / configuration	Open single-room layout with furniture and partitions finalized by approved drawing.
SPEC-28	Painting / coating	One red-oxide primer coat followed by two compatible anti-rust enamel coats on prepared MS surfaces; project exposure may require an upgraded coating system.
SPEC-29	Quality checks	Pre-dispatch checks cover dimensions, member and sheet identification, welds, coating, roof drainage, weather sealing, doors, windows, electrical continuity and functional operation.
SPEC-30	Warranty	Warranty period and exclusions are confirmed only in the final quotation; relocation damage, misuse, site services and unapproved alterations remain outside the agreed scope unless stated otherwise.

03 How to use this technical pack

1**SELECT A SIZE**

Compare the six current published variants on area, occupancy, approximate completed unit weight and reference price.

2**REVIEW THE EFFECTIVE SPECIFICATION**

Use all 30 rows as the current technical reference. Final member selections, openings, services and fit-out follow the approved project documents.

3**CHECK THE APPROVED GA BOARD**

Use the board for the selected size as a planning reference. The final approved drawing governs fabrication and supplied layout.

4**REQUEST AN ITEMISED QUOTATION**


Confirm delivery location, access, unloading, foundations, utilities, installation and customisation before order acceptance.

Final project scope is governed by the accepted quotation and approved drawing.

Contact: <https://www.samanportable.com/contact-us>


04.1 Approved GA reference - 10x10 ft

Fit-within-page reproduction of the existing approved repository asset. Final approved drawing governs the supplied layout.

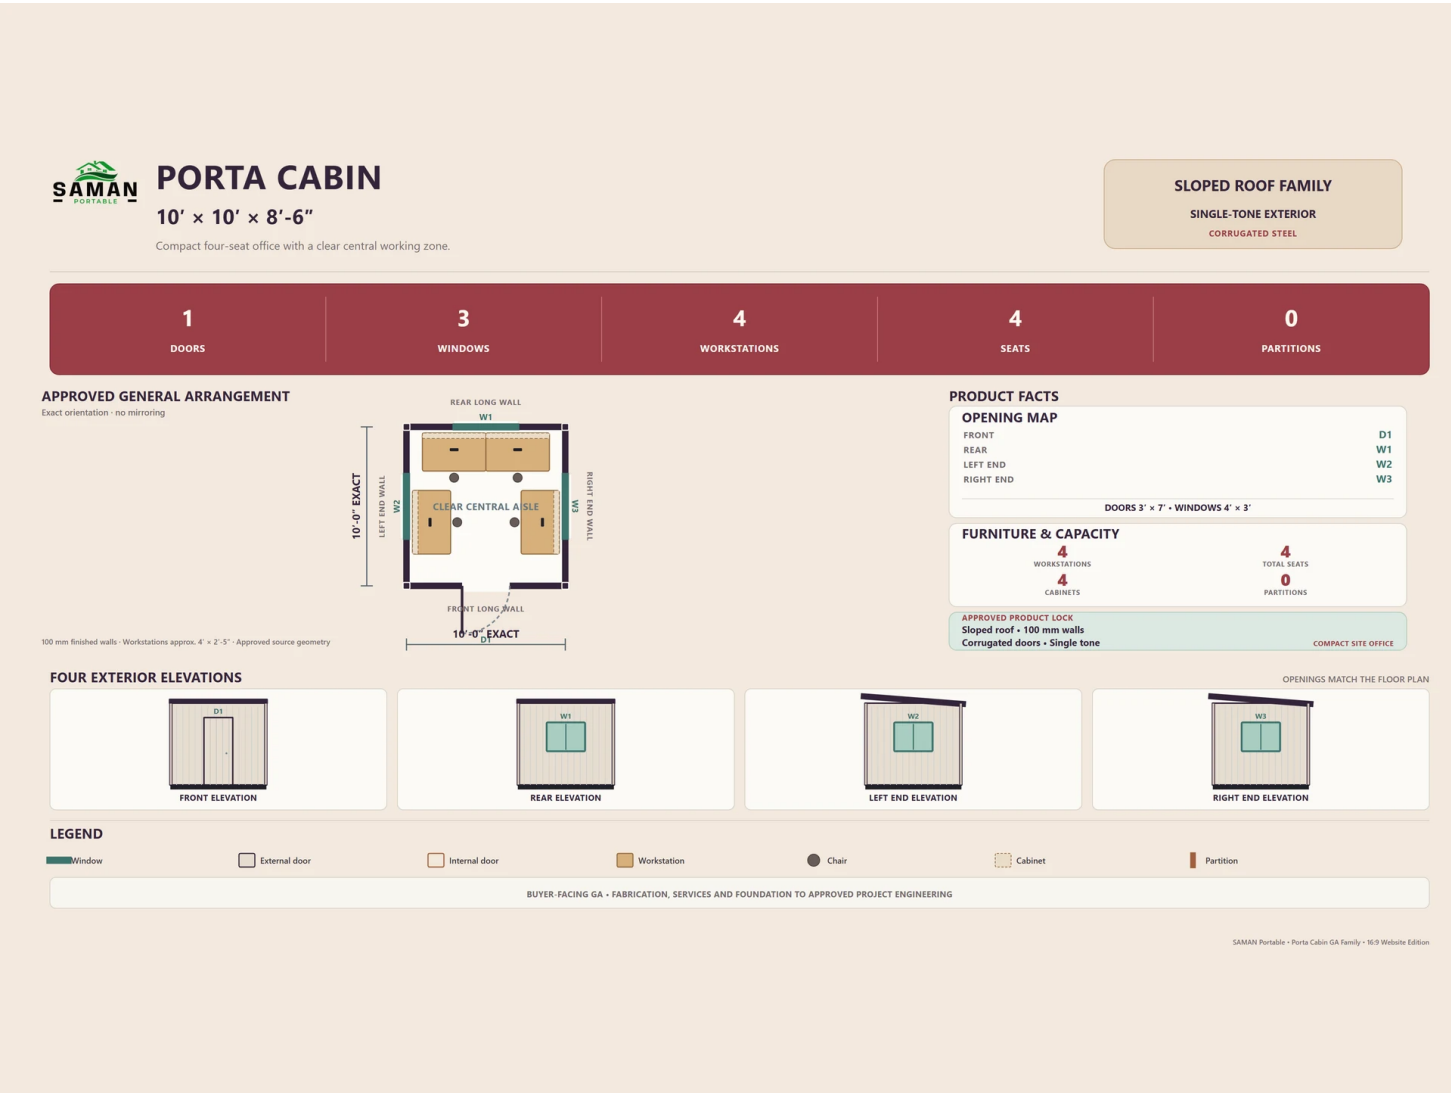


04.2 Approved GA reference - 20x8 ft

Fit-within-page reproduction of the existing approved repository asset. Final approved drawing governs the supplied layout.

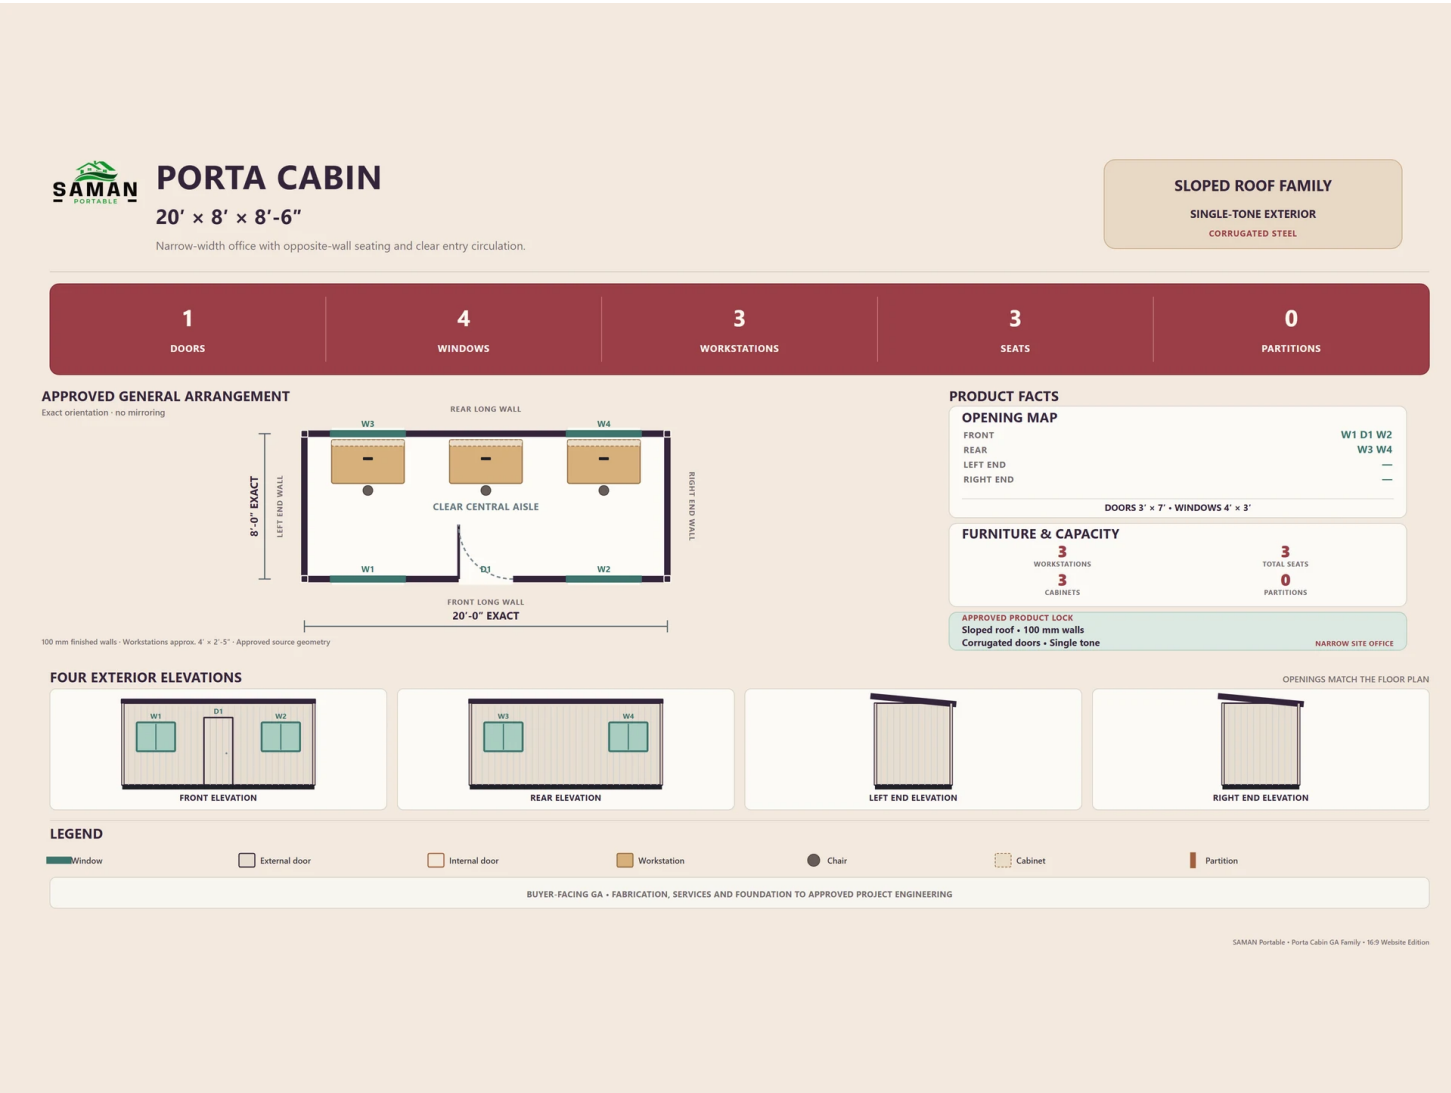


04.3 Approved GA reference - 20x10 ft

Fit-within-page reproduction of the existing approved repository asset. Final approved drawing governs the supplied layout.

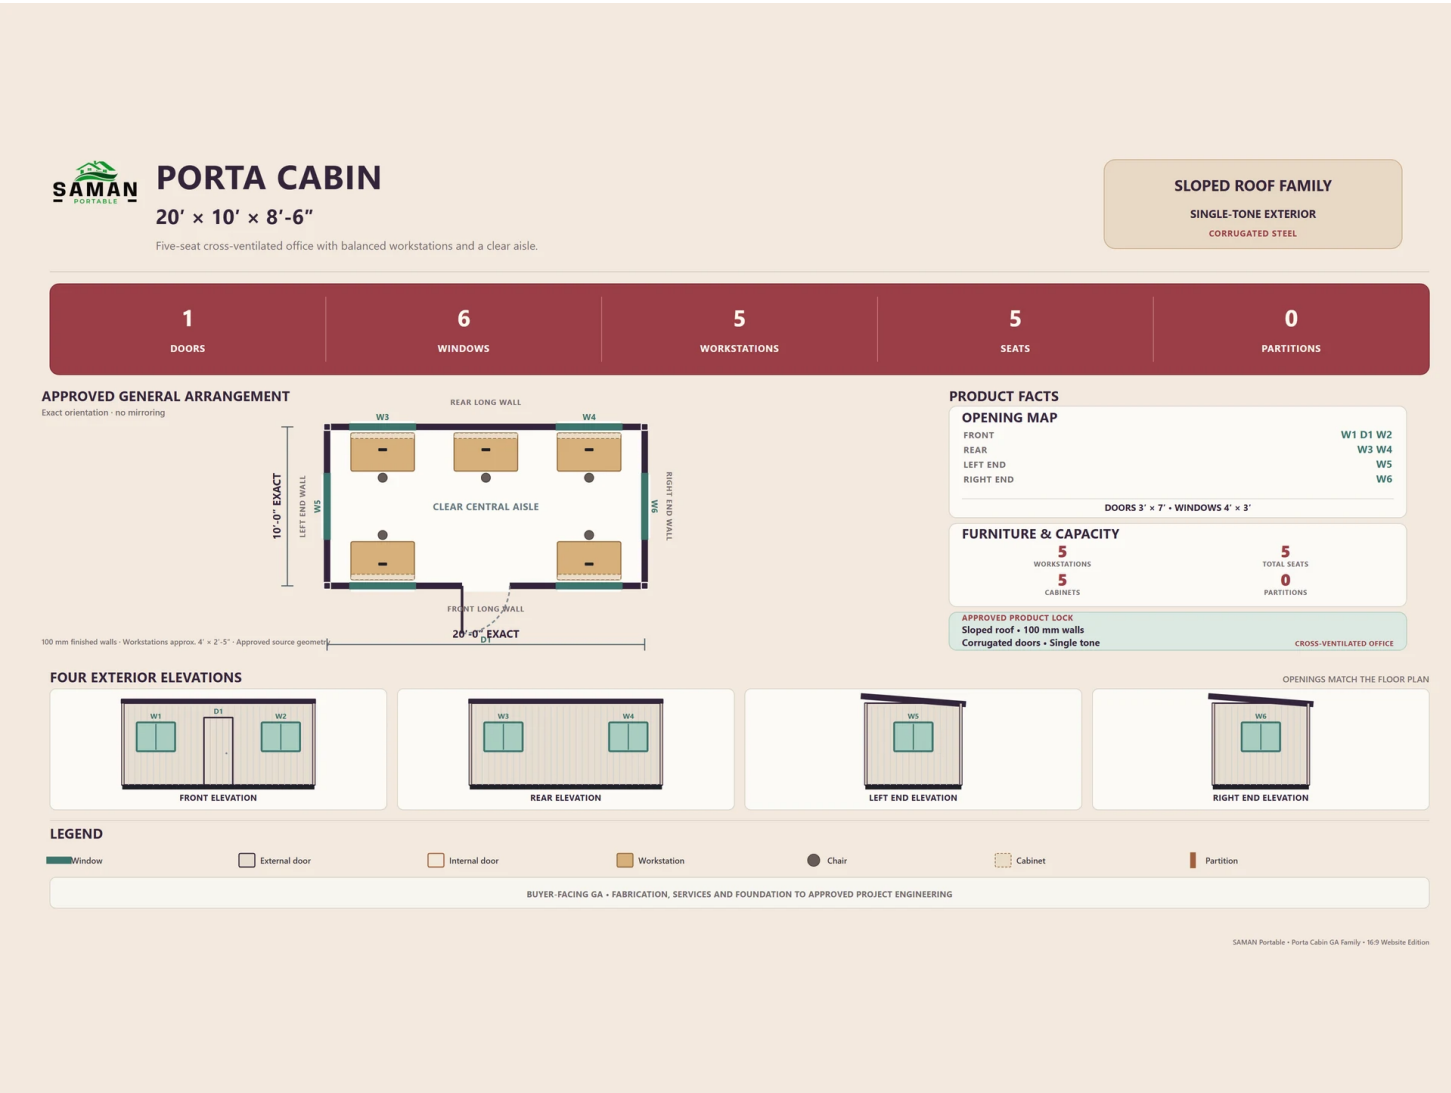


04.4 Approved GA reference - 20x12 ft

Fit-within-page reproduction of the existing approved repository asset. Final approved drawing governs the supplied layout.

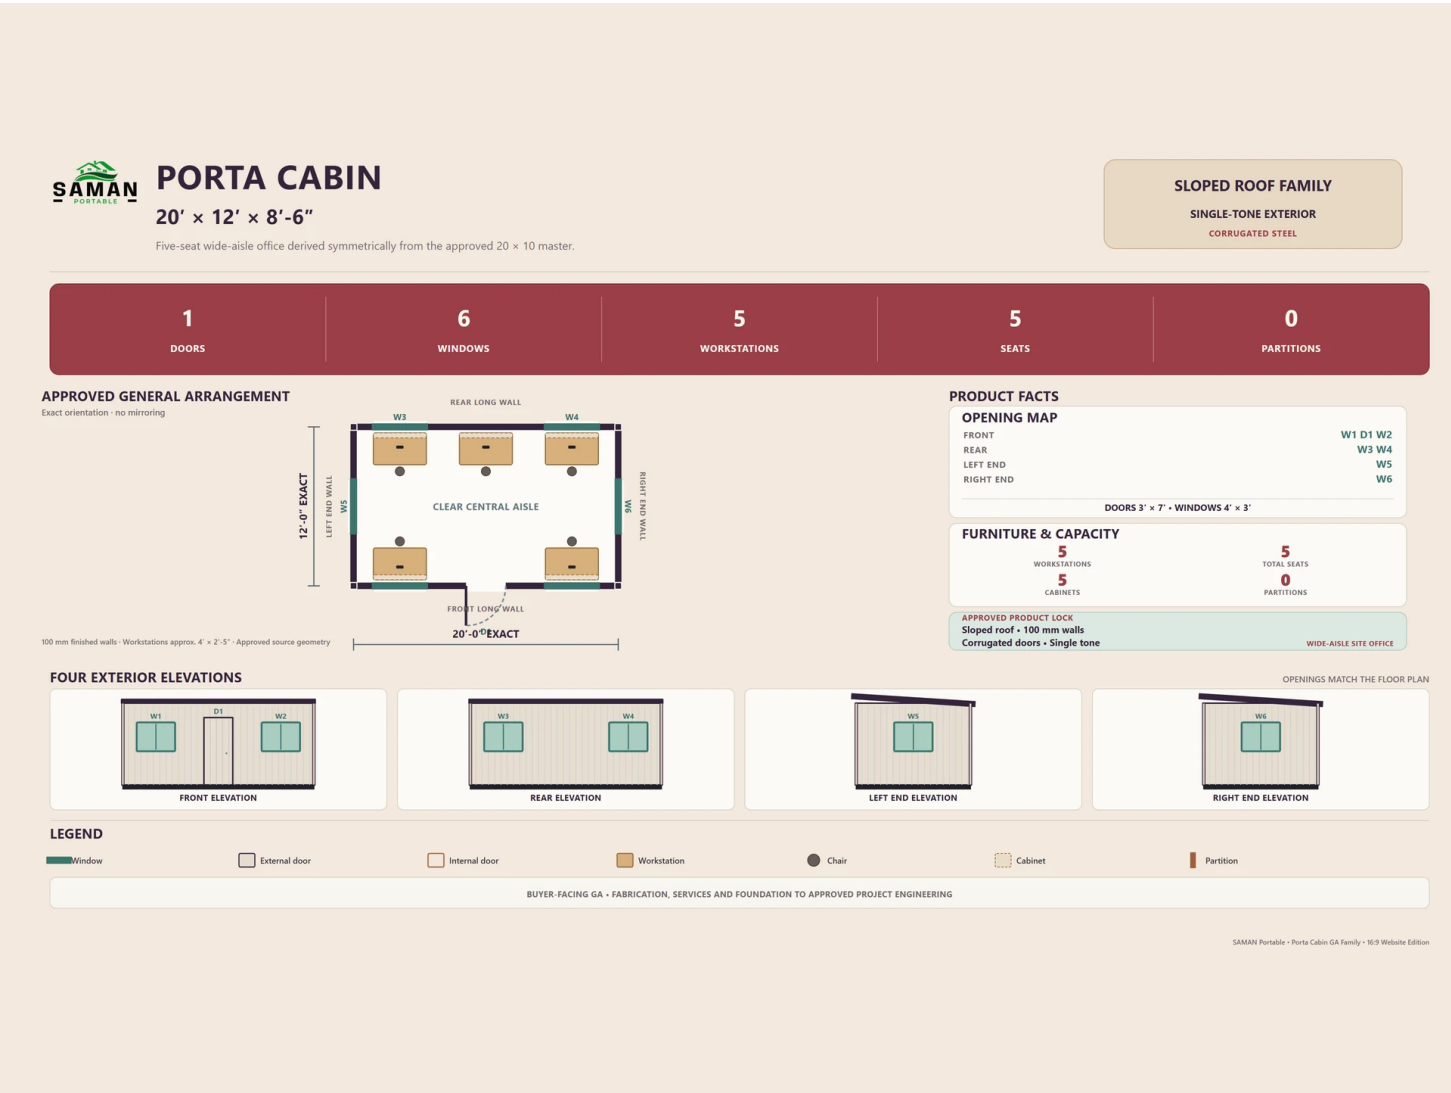


04.5 Approved GA reference - 30x10 ft

Fit-within-page reproduction of the existing approved repository asset. Final approved drawing governs the supplied layout.

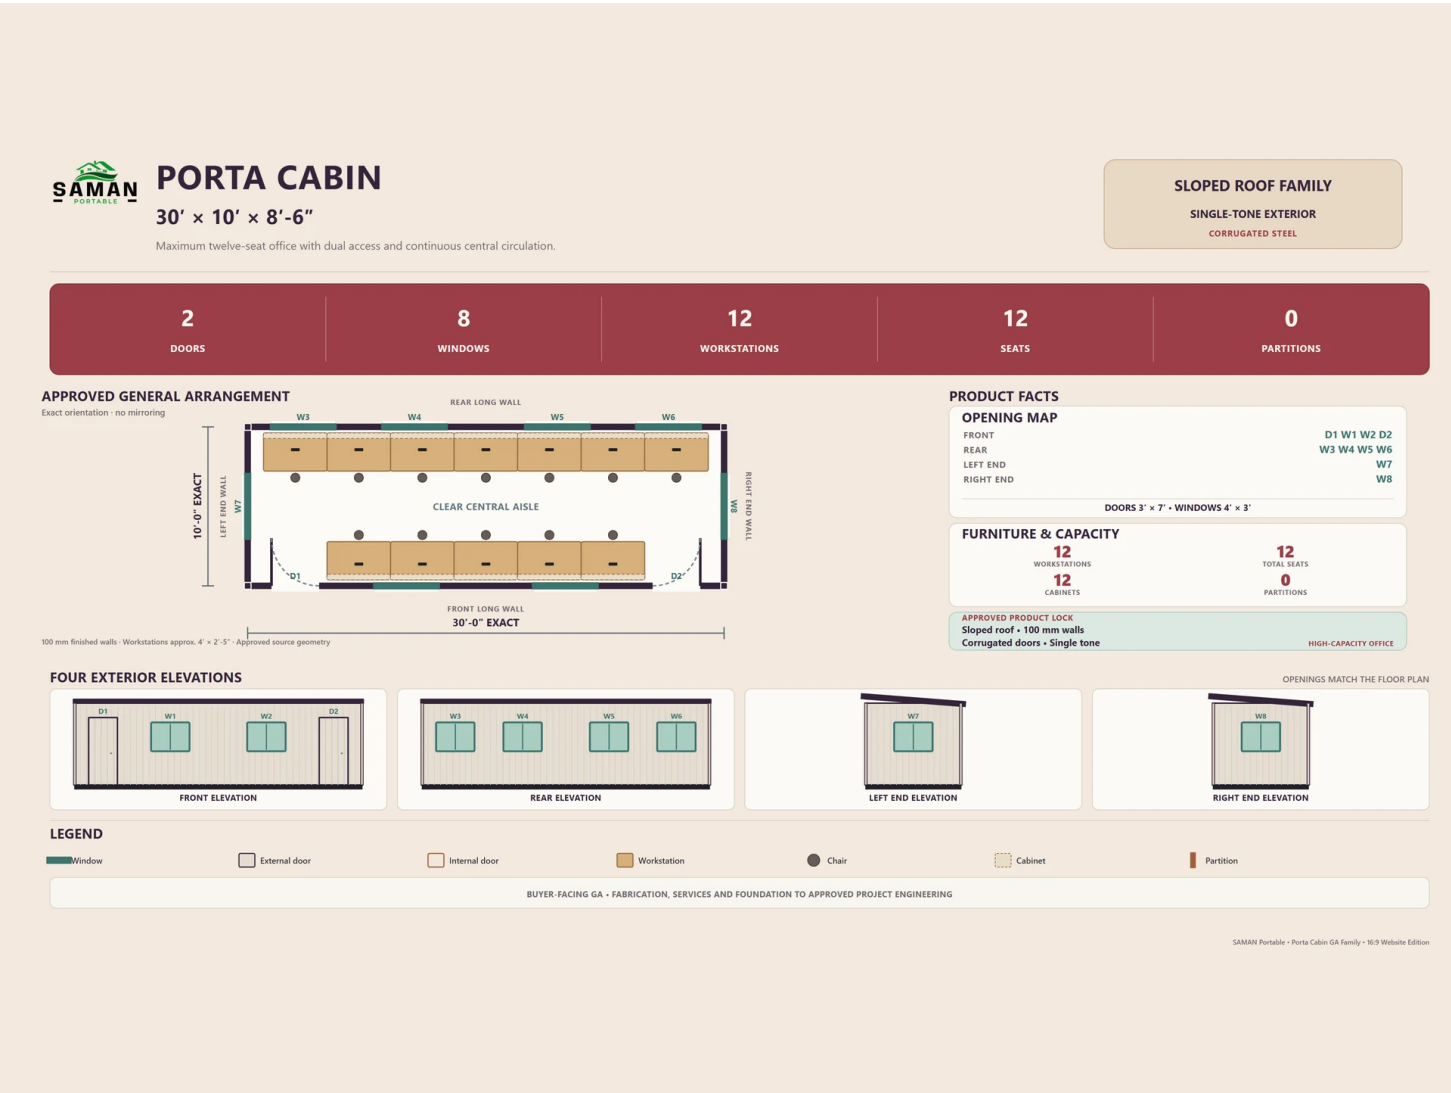

FOUR EXTERIOR ELEVATIONS



FRONT ELEVATION



REAR ELEVATION



LEFT END ELEVATION



RIGHT END ELEVATION

OPENINGS MATCH THE FLOOR PLAN

LEGEND

Window

External door

Internal door

Workstation

Chair

Cabinet

Partition


BUYER-FACING GA - FABRICATION, SERVICES AND FOUNDATION TO APPROVED PROJECT ENGINEERING

SAMAN Portable - Porta Cabin GA Family - 16/9 Website Edition

GA-ASSET-30x10 | /images/products/porta-cabins/size-section/porta-cabin-ga-plan-30x10.webp | SHA256 dbf5657c430f31ad9db2b5464a5d4e12e8d9e59be82fa02fcb2f7d1c4956f85f

04.6 Approved GA reference - 40x10 ft

Fit-within-page reproduction of the existing approved repository asset. Final approved drawing governs the supplied layout.

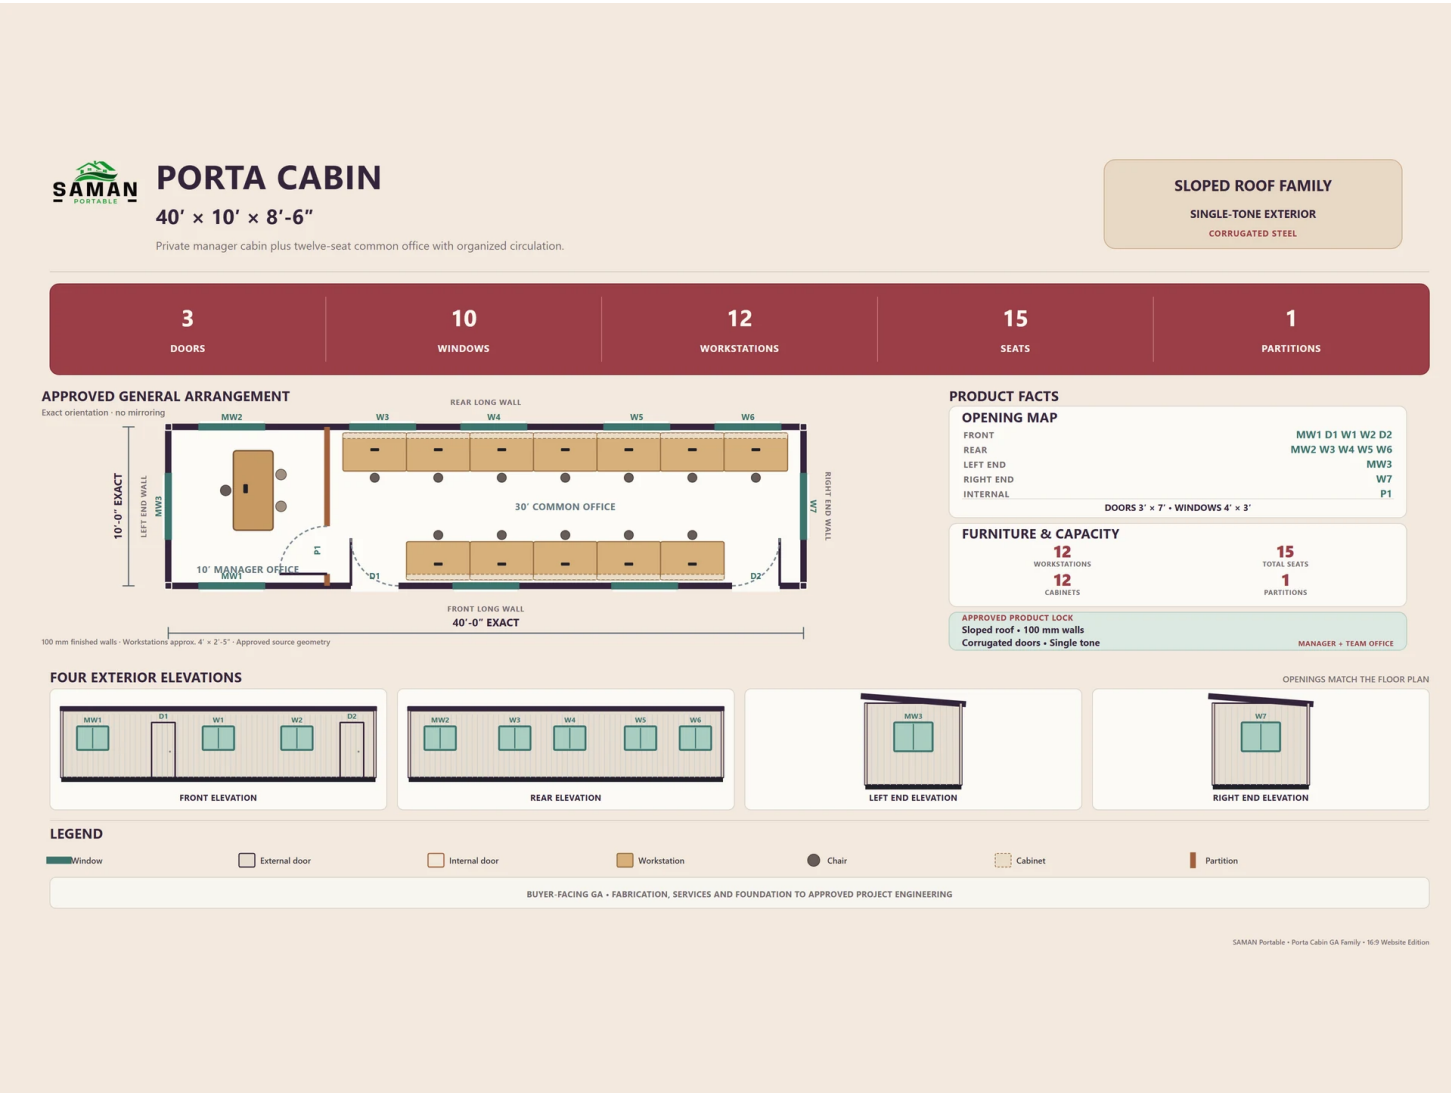

GA-ASSET-40x10 | /images/products/porta-cabins/size-section/porta-cabin-ga-plan-40x10.webp | SHA256 1f06d0b5b379d132ef5176b3a1f654df6cf7ca1f2fdb9e5b6b50856bedf0bf4c